

## INVITATION TO BID

Proposals are invited by the owners for rehabilitation work on the property specified below:

Project Address: 716 Main Street  
Torrington CT 06790

Proposals will be received until 9:00 a.m. on Wednesday, April 29, 2015 at which time they will be opened. Proposals will be delivered to:

City of Torrington  
Purchasing Department Office  
140 Main Street  
Torrington CT 06790

Project Specifications are available at the Torrington, Purchasing Department Office, Mon. through Weds. 8:30 a.m. to 4:00 p.m., Thurs. 8:30 a.m. to 6:30 p.m., Fri. 8:30 a.m. to 12:30 p.m., or at the State of Conn. Dept. of Admin. Services (DAS) website, [www.das.ct.gov](http://www.das.ct.gov), State Contracting Portal, Town of Torrington, Solicitation Number (Project #143-351)

For more information, contact Bob Caliolo at phone: 203-573-1188 x 211 or email: [bob@lwagnerassociates.com](mailto:bob@lwagnerassociates.com).

A mandatory pre-bid conference will be held at the following location and time:

**PRE-BID Wednesday, April 22, 2015**  
9:30 a.m.  
716 Main Street  
Torrington CT 06790

The above work includes: Roofing, windows, doors, carpentry, electrical, heating, masonry, lead paint abatement.

AN AFFIRMATIVE ACTION / EQUAL OPPORTUNITY EMPLOYER  
WBE / MBE / SBE AND SECTION 3 DESIGNATED CONTRACTORS  
ARE ENCOURAGED TO APPLY

---

Please run the above advertisement as a legal advertisement one time only on the publication date of, Thursday April 16 2015. Any questions regarding same please call 573-1188 and ask for Bob Caliolo. Please reference I.D .143-351 on all billing invoices regarding this advertisement. Tear sheet is required for processing of payment.

Please bill to: City of Torrington  
Housing Rehab Program  
140 Main Street  
Torrington CT 06790

**INSTRUCTIONS TO BIDDERS**

Mail or deliver this entire completed bid package in a sealed envelope to be received no later than 9:00 a.m. on Wednesday, April 29, 2015

TO: City of Torrington  
Purchasing Department Office  
140 Main Street  
Torrington CT 06790

To be noted on outside of envelope:

**DO NOT OPEN UNTIL 9:00 a.m. on Wednesday, April 29, 2015**

Project No. 143-351  
716 Main Street  
Torrington CT 06790

**THERE WILL BE A MANDATORY PRE-BID CONFERENCE AT THE ABOVE SITE AT:  
9:30 a.m. on: Wednesday, April 22, 2015**

**NOTE: CONTRACTOR IS TO SUBMIT THIS ENTIRE BID PACKAGE. ALL BIDS MUST BE FILLED OUT COMPLETELY. IT IS SUGGESTED THAT CONTRACTORS RETAIN A COPY OF THIS ENTIRE BID PACKAGE.**

**ALL BIDS SHALL REMAIN IN EFFECT FOR FORTY FIVE (45) CALENDAR DAYS AFTER THE RECEIPT OF BIDS.**

**CONTRACTOR'S BUSINESS NAME: \_\_\_\_\_  
(PLEASE PRINT)**

**AN AFFIRMATIVE ACTION/EQUAL OPPORTUNITY EMPLOYER  
WBE / MBE / SBE AND SECTION 3 DESIGNATED CONTRACTORS  
ARE ENCOURAGED TO APPLY**



CITY OF TORRINGTON  
SCOPE OF WORK, PART 1, GENERAL CONDITIONS

OWNER: Catherine Kane  
ADDRESS: 716 Main Street  
Torrington CT 06790

PROJECT: 143-351

1. The Contractor, unless otherwise specified, shall provide all labor, materials, tools, equipment, and related items, and pay all necessary taxes, fees, and permits necessary to complete all of his work as detailed on the attached scope of work.
2. All rehabilitation, alterations, repairs, or extensions shall be in compliance with all applicable codes of the Municipality. All electrical, heating, and plumbing work shall comply with the rules and regulations of the National, State and Local Codes. Before commencing work, contractors and/or subcontractors shall obtain all necessary permits.
3. The Contractor certifies that he has familiarized himself with the requirements of the specifications and plans and understands the extent and character of the work to be done, and inspected the premises and given his full attention to any and all areas with which he might become specifically involved. He must familiarize himself with all conditions relating to and affecting his work and bid.
4. The selected Contractor must, prior to contract signing, supply the City of Torrington and the Owner with the original certificates of insurance for general liability, auto liability, and worker's compensation, as applicable. General liability insurance shall be a broad form contractual endorsement with minimum limits of one million (\$1,000,000.00) dollars per occurrence for bodily injury and five hundred thousand (\$500,000.00) dollars per occurrence for property damage. Auto Liability insurance shall cover hired and non-hired autos in accordance with State law. Workers' Compensation Insurance shall have a minimum limit of one hundred thousand (\$100,000.00) dollars for each accident. The Contractor shall indemnify and save harmless the Owner and the City of Torrington under these policies. The contractor shall name the City of Torrington, its agents and the Owner as additional insured as their interests may appear on the General Liability Insurance.
5. The Contractor agrees that all services offered by the Municipality through L. Wagner & Associates, Inc. (hereinafter referred to as the "Consultant"), which may affect the Contractor, are offered by the Municipality in order to assist in the project implementation and the necessary program compliance. The Contractor agrees to, upon review and acceptance of such services provided, indemnify, defend, save and hold harmless the Municipality and Consultant, their officers, agents and employees from and against any and all damage, liability, loss, expense, judgment or deficiency of any nature whatsoever (including, without limitation, reasonable attorney's fees and other costs and expenses incident to any suit, action or proceeding) incurred or sustained by Municipality or consultant which shall arise out of or result from consultant's performance in good faith of services pursuant to the Professional Services Contract. The Contractor agrees that the Consultant shall not be liable to the Contractor, its heirs, successors or assigns, for any act performed within the duties and scope of employment pursuant to Professional Services Contract.

6. All materials shall be new and of acceptable quality. The property Owner shall select all colors, models, etc. All materials and work must be applied in accordance with the applicable manufacturer's latest instructions and specifications, and in accordance with Federal prohibitions against the use of lead paint. All manufacturers' warranties are to be extended to the property Owner free and clear of all liens. Unless otherwise specified, all labor, material, and workmanship provided by the Contractor shall be guaranteed by the Contractor for a one (1) year period from the date of the Certificate of Completion. This guarantee shall be in addition to and not in limitation of, in lieu of, or modify any other guarantee that is due the property Owner from any manufacturer.
7. The Contractor shall repair or replace all work, materials, and equipment which are found to be defective during construction and the guarantee period. Repair shall include all damage to surrounding work caused by the failure and/or necessary for the repair or replacement of the defect. All repairs and replacements shall be performed at no additional expense to the Owner and shall be completed promptly after the Contractor receives notice of the defect.
8. The Contractor shall take all necessary measures and precautions to protect the surroundings from damage occurring due to performance of the work. If such damage occurs it will be repaired by the Contractor at no cost to the Owner.
9. The Contractor shall dispose of all debris and remove all material resulting from his work in accordance with local and State law. The Contractor shall police and maintain a clean and safe job site daily. He shall reinstall accessories taken down and clean up all scrap around the project and remove fingerprints. All on-site maintenance relating to the performance of the work shall be the responsibility of the Contractor until the Certificate of Completion is issued. The project shall be maintained in a habitable and safe condition daily if the project is to remain occupied.
10. All work shall be neat and accurate and done in a manner in accordance with customary trade practices.
11. The Contractor shall not make any changes to the scope of work unless a change order is processed and fully executed by the property Owner and the Program.
12. The Owner may cancel this contract by (to be determined) and not be liable to the Contractor or the Municipality. Should the Owner opt to cancel they must sign and send the attached cancellation notice, see Attachment A, to the Contractor, otherwise the Owner shall issue a Notice to proceed authorizing the contractor to commence with the proposed improvements. Should the Notice to Proceed not be issued prior to 10 consecutive calendar days from the date of the expiration date of the right to cancel then the Contract will become Null and void.
13. The Contractor shall commence work under this contract prior to (to be determined) and complete the work by (to be determined).

14. If the Contractor is delayed at any time in the progress of the work by any act or neglect of the Owner or by any employee of the Owner, or by any separate Contractor employed by the Owner, or by changes ordered in the work or by labor disputes, fire, unusual delay in delivery of materials, transportation, adverse weather conditions not reasonably anticipatable, unavoidable casualties, or any causes beyond the Contractor's control, or by delay authorized by the Owner pending arbitration, or by any other cause which justifies the delay, the contract time shall be extended by Change Order for such reasonable time as may be agreed upon by all parties. It shall be the responsibility of the Contractor to request and document in writing such extensions within three (3) calendar days. In the event that the Contractor does not commence or pursue the work as hereinafter stated, then the Owner shall have the right to terminate this agreement and to hire a successor Contractor to perform the work. Any such termination shall be by certified mail to the address noted in this agreement, and shall be effective as of the date of mailing. Payments by the Owner in the event of termination shall be as follows:
15. The successor Contractor shall first be paid and then the terminated Contractor. Payments to the terminated Contractor shall be limited both as to those funds remaining after payment to the successor Contractor but shall not exceed the value of the work actually performed by the terminated Contractor. Further, should the total cost for work performed under this contract exceed the amount stated in this agreement due to the Contractor's termination, then the Owner shall have a cause of action against the terminated Contractor for any such additional cost.
16. If, through any cause, the Contractor shall fail to fulfill in a timely and proper manner his obligations under this Contract, or if the Contractor shall violate any of the covenants, agreements, or stipulations of this Contract, the Owner shall, thereupon, have the right to terminate this Contract by giving written notice to the Contractor of such termination and specifying the effective date of such termination. In such event, all unfinished work required by the Contractor under this Contract shall, at the option of the Owner, be completed or not.
17. The Contractor may request a maximum of (to be determined) progress payments as work is completed in accordance with the attached specifications. The request shall be in the form of an itemized bill for that portion of work completed by the Contractor. All requests for payment shall be accompanied by a fully executed Lien Waiver, on a form provided by the Program. Final payment is contingent upon the receipt of a signature of the respective inspector for which each permit was issued. The Contractor shall be responsible for obtaining the signatures and presenting them upon final payment.
18. All claims or disputes between the Owner and Contractor arising out of or related to the work shall be resolved in accordance with Construction industry arbitration rules of the American Arbitration Association (AAA), unless the parties mutually agree otherwise. The Owner and Contractor shall submit all disputes or claims, regardless of the extent of the work's progress, to AAA. Notice of the demand for arbitration shall be filed in writing, with a copy to the other party to this Construction Agreement, and shall be made within a reasonable time after the dispute has arisen. The award rendered by the arbitrator shall be final, and judgment may be entered upon it in accordance with applicable law in any court having jurisdiction thereof. If the arbitrator's award is in a sum which is less than that which was offered in settlement by the Owner, the arbitrator may award costs and attorney's fees in favor of the Owner.

If the award of the arbitrator is in a sum greater than that which was offered in settlement by the Contractor, the arbitrator may award costs and attorney's fees in favor of the Contractor.

It is understood and agreed by the parties hereto that neither party will institute any form of legal action, including, but not limited to, attaching the assets of the other party, unless and until it has made a good faith attempt to have the dispute resolved in accordance with the provisions of this Section. Noncompliance with the conditions precedent constitutes a waiver of the right to assert said claim.

19. Section 3 of the Housing and Urban Development Act of 1968 applies to this contract if the amount of HUD assistance exceeds \$200,000 or the contract or subcontract exceeds \$100,000. The Contractor shall, to the maximum extent feasible, provide opportunities for training and employment in connection with this contract to low income persons residing in the PMSA relevant to the project location. The Contractor must make a good faith effort to fill any job vacancies and training opportunities with low income persons residing in the PMSA relevant to the project location. Where the preceding applies, contractors must comply with the following Section 3 Clause:
  - A. The work to be performed under this contract is subject to the requirements of Section 3 of the Housing and Urban Development Act of 1968, as amended, 12 U.S.C. 1791u (Section 3). The purpose of Section 3 is to ensure that employment and other economic opportunities generated by HUD assistance or HUD-assisted projects covered by Section 3, shall, to the greatest extent feasible, be directed to low- and very low-income persons, particularly persons who are recipients of HUD assistance for housing.
  - B. The parties to this contract agree to comply with HUD's regulations in 24 CFR part 135, which implement Section 3. As evidenced by their execution of this contract, the parties to this contract certify that they are under no contractual or other impediment that would prevent them from complying with the part 135 regulations.
  - C. The Contractor agrees to send to each labor organization or representative of workers with which the Contractor has a collective bargaining agreement or other understanding, if any, a notice advising the labor organization or workers representative of the Contractor's commitments under this Section 3 clause, and will post copies of the notice in conspicuous places at the work site where both employees and applicants for training and employment positions can see the notice. The notice shall describe the Section 3 preference shall set for the minimum number and job titles subject to hire, availability of apprenticeship and training positions, the qualifications for each; and the name and location of the person(s) taking application for each of the positions; and the anticipated date the work shall begin.

- D. The Contractor agrees to include this Section 3 clause in every subcontract subject to compliance with regulations in 24 CFR part 135, and agrees to take appropriate action, as provided in an applicable provision of the subcontract or in this Section 3 clause, upon a finding that the subcontractor is in violation of the regulations in 24 CFR part 135. The Contractor will not subcontract with any subcontractor where the Contractor has notice or knowledge that the subcontractor has been found in violation of the regulations in 24 CFR part 135.
- E. The Contractor will certify that any vacant employment positions, including training positions, that are filled (1) after the Contractor is selected but before the contract is executed, and (2) with persons other than those to whom the regulations of 24 CFR part 135 require employment opportunities to be directed, were not filled to circumvent the Contractors obligations under 24 CFR part 135.
- F. Noncompliance with HUD's regulations in 24 CFR part 135 may result in sanctions, termination of this contract for default, and debarment or suspension from future HUD assisted contracts.
20. The Contractor will not discriminate against any employee or applicant for employment because of race, color, creed, religion, sex, sexual preference, national origin, or mental or physical disability during the performance of this agreement. The Contractor will take affirmative action to ensure that applicants are employed, and that employees are treated during employment, in all employment practices such as the following: employment, upgrading, demotion or transfer, recruitment, advertising, layoff or termination, rates of pay or other forms of compensation and selection for training, including apprenticeship, without regard to their race, color, creed, religion, sex, sexual preference, national origin or mental or physical disability. This provision will be inserted in all subcontracts for work covered by this agreement.
21. In the event of the Contractor's noncompliance with this equal opportunity clause or with any of the said rules, regulations, or orders, this contract may be canceled, terminated, or suspended in whole or in part and the Contractor may be declared ineligible for further contracts in accordance with procedures authorized in Presidential Executive Order 11246, or by rule, regulations, or order of the Secretary of Labor or as provided by law.
22. The following applies to all contracts of \$10,000.00 or more: SECTION 402 VETERANS OF THE VIETNAM ERA. AFFIRMATIVE ACTION FOR DISABLED VETERANS AND VETERANS OF THE VIETNAM ERA. The Contractor will not discriminate against any employee or applicant for employment because he or she is a disabled veteran of the Vietnam era in regard to any position for which the employee or applicant for employment is qualified. The Contractor agrees to take affirmative action to employ, advance in employment and otherwise treat qualified disabled veterans and veterans of the Vietnam era without discrimination based upon their disability or veteran status in all employment practices such as the following: employment upgrading, demotion or transfer, recruitment, advertising, layoff or termination, rates of pay or other forms of compensation and selection for training, including apprenticeship.

23. The premises herein shall be occupied during the course of the construction work.
24. No officer, employee or member of the Governing Body of the City of Torrington shall have any financial interest, direct or indirect, in this contract or the proceeds of this loan.
25. The Owner and/or City Torrington retains the right to reject any or all bids or any part of any bid in part or in whole if deemed to be in the best interest of the Owner and/or City Torrington.
26. Substitutions of materials from that specified are only allowed on an approved/equal basis. The Contractor must submit written documentation of the substitute item or material for approval by the Owner and Program prior to making such substitution. Any items or material substituted by the Contractor without prior written approval of the Owner and Program will at Contractor's expense be replaced if it is determined not to be equal to the item or material specified. Any surrounding, adjoining, or dependent items affected by replacement of unequal substituted material shall also be replaced, reworked, and reinstalled at no cost to the Owner.
27. Bids shall contain prices for general categories of work and/or items as specified on the attached sheets. In the event of a discrepancy between prices listed in the specifications and those on the cost summary sheet, the prices listed on the specification for that section shall prevail. In the case of a mathematical error by the Contractor, the correct sum of the individual line items in the specifications (not in the cost summary) shall be the Contractor's bid.
28. All bids shall remain in effect for thirty (30) calendar days.
29. The Owner will supply all necessary power required by the Contractor at no additional cost to complete his work. Power shall be limited to the use of existing outlets and shall not exceed the existing capacity of the system. Power required over the capacity of the existing electrical system shall be the responsibility of the Contractor. Heating during construction shall be supplied by the owner.
30. OTHER PROVISIONS - LEAD BASED PAINT
  - A. Any and all rehabilitation work under this Agreement will comply with the requirements of the Federal Lead-Based Paint Poisoning Prevention Act (42 U.S.C. 4831) which prohibits the use of lead-based paint in residential structures constructed or rehabilitated with Federal Assistance in any form.

The construction or rehabilitation of residential structures with assistance provided under this contract is subject to the final regulations "Requirements for Notification, Evaluation and Reduction of Lead-Based Paint Hazards in Federally owned Residential Property and Housing Receiving Federal Assistance". The regulation is at 24 CFR Part 35. It implements sections 1012 and 1013 of the Residential Lead-Based Paint Hazard Reduction Act of 1992, Title X, of the Housing and Community Development Act of 1992. Sections 1012 and 1013 amend the Lead-Based Paint Poisoning Prevention Act of 1971.

Provided, however, that the Owner shall have sole responsibility for assuring that his property conforms to the Lead-Based Paint Removal Requirements and the Program shall not assume any liability whatsoever as a result of identifying volatile levels of Lead-Based Paint or its removal except insofar as to comply with applicable environmental regulations.

PUBLIC LAW 91-695 "LEAD-BASED PAINT POISONING PREVENTION ACT"  
The Contractor shall adhere strictly to the provisions of the "Lead-Based Paint Poisoning Prevention Act". Specifically, the Contractor will not utilize lead-based paint as a finish or undercoat or any other use in or out of residential dwellings funded in whole and/or part by the Federal Government.

31. The specifications and drawings, if any, are complimentary. Work described in the specifications does not necessarily have to appear on the drawings, nor does work described on the drawings necessarily have to appear in the specifications. The Contractor is responsible for estimating all work whether described in the specifications, the drawings, or both. If there is a discrepancy between the drawings and the specifications, the specifications shall prevail. All work, whether described in the specifications, or the drawings is to be included in the bid summary sheet by appropriate line item. The contract will only be awarded to general Contractors bidding on ALL line items.

**ATTACHMENT A**

**Notice of Cancellation**

To be determined

You may cancel this transaction without any penalty or obligation, within three business days from the above date.

If you cancel, any property traded in, any payments made by you under the contract or sale, and any negotiable instrument executed by you will be returned within ten business days following receipt by the seller of your cancellation notice, and any security interest out of the transaction will be canceled.

If you cancel, you must make available to the seller at your residence, in substantially as good condition as when received, any goods delivered to you under this contract or sale; or you may, if you wish, comply with the instructions of the seller regarding the return shipment of the goods at the seller's expense and risk. If you do make the goods available to the seller and the seller does not pick them up within twenty days of the date of the cancellation, you may retain or dispose of the goods without any further obligation. If you fail to make the goods available to the seller, or if you agree to return the goods to the seller and fail to do so, then you remain liable for performance of all obligations under the contract.

To cancel this transaction, mail or deliver a signed and dated copy of this cancellation notice or any other written notice, or send a telegram to (Contractor Name) at (Contractor Address), (Contractor City, State, Zip), not later than midnight of (Contract Cancel Date).

I hereby cancel this transaction.

\_\_\_\_\_  
Signed

\_\_\_\_\_  
Date

## LEAD PAINT INFORMATION AND LEAD REPORT

### Lead Hazards

1. The contractor will address all lead hazards listed in the enclosed lead report.
2. If the total cost of the project exceeds \$25,000 the contractor carrying out the work must comply with the licensing requirements established pursuant to Connecticut General Statute sections 20-474 through 20-476, and the Lead Licensure and Certification Regulations sections 20-478-1 through 20-478-2. The contractor carrying out the work must be licensed by the Connecticut Department of Public Health as a Licensed Lead Abatement Contractor. Employees carrying out the work must be certified as Lead Abatement Workers. At least one employee onsite must hold certification as a Lead Abatement Supervisor.
3. If the location of the rehabilitation project is the residence of a child under the age of six, then the contractor carrying out the work must comply with the licensing and certification requirements described in paragraph A, above. The contractor must also carry out lead abatement work, as described under the Lead Poisoning Prevention and Control Regulations section 19a-111-1 through 19a-111-11. A contractor shall not begin work until after the lead abatement work plan has been approved by the local Director of Health.
4. If the total cost of the project is under \$25,000 the contractor carrying out the work must comply with the requirements of the U.S. Environmental Protection Agency's (EPA) Renovation, Repair and Painting Rule (RRP Rule), as well as with HUD's Lead-Safe Work Practices requirements. The company or firm hired to carry out the work shall hold the credential of "EPA RRP Certified Firm." An individual representing that firm, must hold the credential of "EPA certified Renovator." Workers onsite must be trained in lead-safe work practices. (Please note: Although the HUD Lead-Safe Work Practices requirements do not apply to projects that are below \$5,000, the EPA RRP Rule does apply to projects that cost less than \$5,000. Also, the EPA and HUD lead-safe work practices 'certifications' are not equivalent to the licensure and certification requirements of the Connecticut Department of Public Health.)

### **Disposal**

1. The Contractor shall perform a Toxicity Characteristic Leaching Procedure test, TCLP, as pursuant to Regulations of Connecticut State Agencies Section 22a-449(c)-101(a) (1), incorporating 40 CFR 262.24.
2. The TCLP test will determine the toxicity of the material being disposed of and classify it as either bulky waste or hazardous waste.
3. The Contractor shall assume in their bid price that the TCLP test will result in the disposal of the material as bulky waste. In the event that the TCLP test determines the material to be disposed of as hazardous waste a change order will be negotiated prior to the disposal.
4. The Contractor shall provide the Owner, Town and Consultant with copies of the TCLP test results.

### **Clearance Testing**

1. The Contractor shall hire a Licensed Lead Abatement Consultant, who employs a Certified Lead Inspector or Certified Lead Inspector Risk Assessor to carry out a re-inspection of the work area where lead hazards have been controlled or eliminated. The re-inspection and clearance sampling shall be done only after completion of the project. If visible debris remains in the work area, the project is not complete. The licensed lead consultant and certified inspector shall issue a letter of compliance when the lead remediation or lead abatement work, and dust wipe results are found to be acceptable.
2. The Contractor shall provide the owner, and town with copies of the dust wipe clearance results and the letter of compliance.

# 716 Main St., Torrington


A/B sides



Rear Porch



Garage

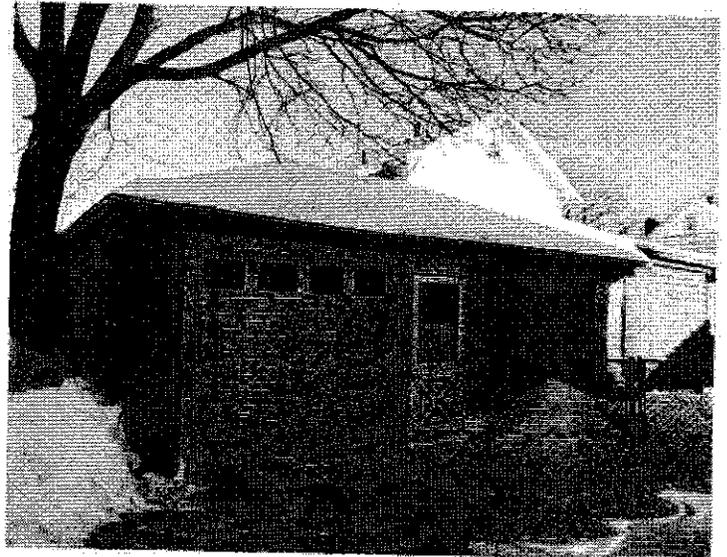

## Table of Contents

<b>I.</b>	<b>Development of Plan</b> .....	<b>2</b>
	Floor Plan.....	<b>2A</b>
<b>II.</b>	<b>Scope of Work: Lead Abatement - Exterior</b> .....	<b>3</b>
<b>III.</b>	<b>Scope of Work: Lead Abatement - Interior</b> .....	<b>X</b>
<b>IV.</b>	<b>Scope of Work: Non-hazardous/Code Correction</b> .....	<b>4</b>
<b>V.</b>	<b>Relocation</b> .....	<b>4</b>
<b>VI.</b>	<b>Staging of Work</b> .....	<b>4</b>
<b>VII.</b>	<b>Clearance</b> .....	<b>4</b>
<b>VIII.</b>	<b>Disclosure</b> .....	<b>4</b>
<b>IX</b>	<b>Notification</b> .....	<b>4</b>
<b>X.</b>	<b>Explanation of Test Results</b> .....	<b>5</b>
<b>XI.</b>	<b>General Specifications</b> .....	<b>6</b>
	Scope.....	6
	Site Examination.....	6
	Workmanship.....	6
	Safety/Protection of Work.....	7
	Definitions in Specifications .....	7
	Materials .....	7
	Changes in Work.....	8
	Permits/Codes/Licenses .....	8
	Coordination of Trades .....	8
	Assignment of Contract .....	8
	Communications .....	8
	Insurance .....	8
	Site Documentation.....	8
<b>XII.</b>	<b>Execution</b> .....	<b>9</b>
	Warning signs .....	9
	Work Area.....	9
	Worker Protection.....	9
	Containment.....	9
	Disposal of Waste .....	9
	Cleanup .....	10
	Testing/Clearance Testing/Monitoring .....	10
<b>XIII.</b>	<b>General Methods/Definitions/Material Specifications</b> .....	<b>11</b>
	Aluminum trim.....	11
	Carpentry.....	11
	Doors: Exterior, Garage, Interior .....	11
	Enclosures .....	11
	Install .....	12
	Liquid encapsulant .....	12
	Other .....	12
	Porch Flooring .....	12
	Radiator covers .....	13
	Remove, Repair, Replace.....	13
	Sheet rock.....	13
	Strip.....	13
	Trim .....	14
	Vinyl siding.....	14
	Windows: basement, vinyl, wood .....	14
	<b>Attachment A – Risk Assessment Summary Notice</b> .....	<b>16</b>
	<b>Attachment B – Management Plan</b> .....	<b>17</b>

## I. Development of Plan

This plan addresses lead abatement; it does not cover any other building code issues that may exist in the house.

Because the scope of work exceeds \$25,000, abatement is required by federal guidelines. There are no children under 6 living here. The risk assessment is based on XRF testing on representative surfaces in the interior and exterior and on dust wipes on a representative floor and sill. Ground cover was not able to be assessed because of snow covering the ground. The basement and attic are not living space and were not included in the risk assessment; only the surfaces on the basement stairs that will be disturbed by the scope of work were tested.

The home is of brick construction. The double-hung wood windows are not original to the structure: They were replaced within the last 30-40 years and have a combination of metal and vinyl tracks. The upper trim of the home is aluminum wrapped and, with the exception of the leaded blindstops, so is the window trim. The blindstops are inaccessible and assumed to be leaded. Also, there are 4 decorative quarter-round windows on the attic level that are assumed to be leaded. All these elements are addressed in the Scope of Work.

The upper trim and ceilings of the porches are enclosed in soffit panels and aluminum wrap.

### Summary of lab test results:

- Dust wipe results: The dust wipes taken on a representative floor and sill were below toxic limits.

Notification to the State Historical Preservation Office was done by L. Wagner and Associates; the scope of work is written assuming that the house is not historic.

Property address: 716 Main St.  
Torrington, CT 06790

Owner: Catherine Kane  
716 Main St.  
Torrington, CT 06790  
(860) 496-7499

Project Manager: L. Wagner & Associates  
Attn: Bob Caliolo  
Phone: 203-573-1188

Lead Testing & Consulting Firm: SafeHomes Inc. (CC000528)

Address: PO Box 1125  
Waterbury, CT 06721-1125  
Phone: 203-591-8100


Lead Planner/ Project Designer Bob Kennedy 002158  
Lead Inspector/Risk Assessor Bob Kennedy 002240

716 Main St., Torrington

For layout only; not to scale




Side C

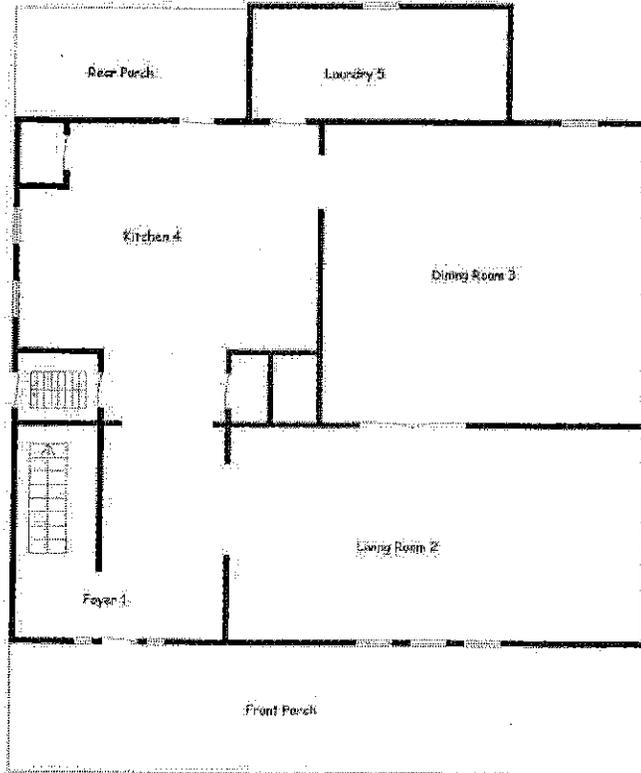

Side B

Side D

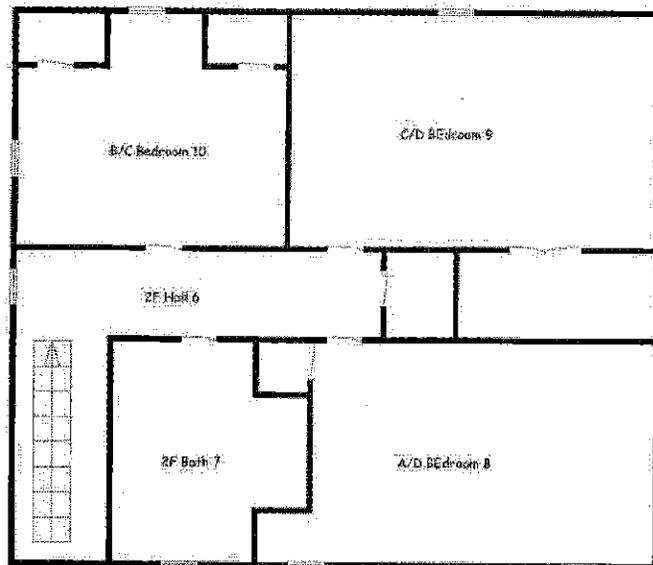

Side A

2A

## II. Scope of Work: Lead Abatement - Exterior

(Condition is noted for each leaded surface as "I" for intact, or "D" for deteriorated/defective)

According to Connecticut law, you must assume that "like" or similar surfaces within each room have a similar level of lead unless a formal test shows otherwise.

An asterisk (\*) under "method" means that alternative(s) are noted below. *Italicized items identify items that are intact, are included on the management plan, but do not need to be addressed at this time. Italics are also used for items that are addressed in another place in the specification.*

### Exterior

#### Leaded Surfaces

*Previously enclosed window wells*

Blindstops

Upper trim

Window sills (concrete)

Attic window sashes

Jamb/ext. jamb to Bsmt Stairs

Condition	Method	Side
<i>I</i>	<i>manage</i>	<i>all</i>
P	enclose	all
P	enclose	B
P	encapsulate	all
P	encapsulate	B/D
P/P	enclose/enclose	B

1. Wrap any exposed window trim – including the blindstops when the double-hung windows are replaced per L. Wagner specs.
2. Replace the missing section of aluminum wrap on the upper trim on the B side.
3. Liquid encapsulate all the concrete window sills on the house and liquid encapsulate the sashes of the 4 attic windows.
4. Replace the unleaded door to the Bsmt with a pre-hung, exterior door per L. Wagner specs. Wrap any exposed trim and the exterior jamb.

### Front Porch

#### Leaded Surfaces

Concrete rails, balusters

Concrete threshold/kickplate to Foyer

Condition	Method	Side
P/P	encap	A/D
P/P	strip/strip	C-left

5. Liquid encapsulate the concrete rail system.

6. Strip the concrete threshold & kickplate to the Foyer

### Rear Porch

#### Leaded Surfaces

Concrete threshold/kickplate to Kitchen

7. Strip the concrete threshold & kickplate to the Kitchen.

Condition	Method	Side
P/P	strip/strip	

### Garage

#### Leaded Surfaces

Upper trim

Window trim

Overhead door casing to boarded-over door

Condition	Method	Side
P	enclose	all
P	encapsulate	A/D
P	encap	A-right

8. Install vinyl soffit panels and wrap the upper trim/fascia per L. Wagner specs.

9. Board-over completely the deteriorated window on the D side of the Garage and liquid encapsulate the exposed frames of the boarded-over window on A-center. Liquid encapsulate the exposed frame/casings of the boarded-over garage door on A-right.

#### **IV. Scope of Work: Non-Hazardous/Code Correction**

See the L. Wagner spec for all other non-lead work.

10. Prime and then paint any new surfaces, repaired surfaces, or stripped surfaces to match the surrounding color scheme.

#### **V. Relocation**

Residents must relocate while interior work including window and door replacement is done. They may return after interior clearance has been passed.

#### **VI. Staging of the work**

The specific dates for the work will be established after the project has gone out to bid and a lead-abatement contractor has been selected.

#### **VII. Clearance**

Note that the contractor is responsible for hiring an independent lead inspector/risk assessor to perform clearance. Clearance wipes must be taken on separate floors, sills, and wells in all rooms in which lead work was done, per the Connecticut standards and must meet the dust wipe standards established by HUD. The lead inspector/risk assessor must issue a letter of compliance at the end of the project and send it to the owner, contractor, health department and L. Wagner and Associates.

#### **VIII. Disclosure**

The Federal Residential Lead-Based Paint Hazard Reduction Act, 42 U.S.C. 4852d, requires sellers and landlords of most residential housing built before 1978 to disclose all available records and reports concerning lead-based paint and/or lead-based hazards, including the test results contained in this notice, to purchasers and tenants at the time of sale or lease or upon lease renewal. This disclosure must occur even if hazard reduction or abatement has been completed. Failure to disclose these test results is a violation of the U.S. Department of Housing and Urban Development and the U.S. Environmental Protection Agency regulations at 24 CFR Part 35 and 40 CFR Part 745 and can result in a fine of up to \$11,000 per violation. To find out more information about your obligations under federal lead-based paint requirements, call 1-800-424-LEAD. Landlords (lessors) and sellers are also required to distribute an educational pamphlet and include standard warning language in their leases or sales contracts to ensure that parents have the information they need to protect their children from lead-based paint hazards.

#### **IX. Notification**

Federal Regulations contain several requirements for notification of tenants.

- Within 15 days of receiving the results of the lead inspection or risk assessment, the property owner must provide the tenants with a summary of the nature, scope and results of the evaluation. This will include:
  - 1) A Summary Risk Assessment Notice (Attachment A)
  - 2) The "Summary" report and cover page of the lead inspection for the tenant's unit and for the common areas/exterior
  - 3) A copy of the scope of work (starting on page 3) for their unit, the common halls, and the exterior.
- The owner must provide the tenants with a copy of the pamphlet "Protect Your Family from Lead in Your Home." If the pamphlet has previously been distributed (and documentation exists), it is not necessary to do it again.

- The contractor must comply with the pre-renovation education provisions of the Lead Renovation, Repair and Painting Final Rule (TSCA 406(b) using the new renovation-specific information pamphlet, entitled "Renovate Right: Important Lead Hazard Information for Families, Child Care Providers and Schools."
- Within 15 days of completing hazard reduction activities, the property owner must provide the tenants a summary of the nature, scope and results of the hazard reduction activities and a summary of any leaded surfaces remaining. This will include the clearance reports and the compliance letters for the common areas and the apartments.

Notices may be posted centrally or may be distributed individually to each tenant. The notice must be written in the language that the tenant's lease is in.

## X. Explanation of inspection reports

The following information explains the lead inspection reports:

1. Summary Report showing information on readings at or above the action level of 1.0 mg/cm<sup>2</sup>. This report shows only the leaded surfaces.
2. Detailed Report showing results of all readings. Both reports identify:
  - The readings, organized by room.
  - *Wall*: this shows the side of the room where the reading was taken. Note that the wall closest to the street side is always the "A" wall – the remaining walls are named in clockwise fashion, with B to the left side, C on the Rear side, and D on the right side. For example, if the inspection refers to a door on the "A side" of a room, it would be located on the wall of the room that is closest to the street.
  - *Structure*: This identifies the component that was tested – for example a window or door.
  - *Location*: This indicates if the reading was on the left, right or center side of the wall.
  - *Member*: This identifies what part of the components was tested. For example, the window sill or the stair tread.
  - *Paint Condition*: The condition of the paint (I for intact, F for fair, and P for poor or defective) Note that "fair" condition means that there are only very small chips and/or hairline cracks. "Poor" simply means that there are visible defects in the surface, usually more than 10% of the surface.
  - *Lead (mg/cm<sup>2</sup>)*: This shows the amount of lead measured in milligrams per square centimeter. Note that anything at or greater than 1.0 mg/cm<sup>2</sup> is considered a toxic level of lead.
  - *Mode*: All readings were taken in "QuickMode", which means the XRF automatically tests as long as necessary to provide a 95% confidence level.

## **XI. General Specifications**

### **Scope**

These specifications cover the abatement of lead from painted building materials that have been determined previously to contain lead. A copy of the inspection reports are attached which identify leaded surfaces. The contractor's work shall make the house lead-safe.

Lead is a serious health hazard to both children and adults. To comply with governmental requirements and minimize employee exposure, controls are necessary wherever there is a potential for exposure to lead dust and fumes. The Contractor is responsible for all work and work areas and shall be at all times in conformance with applicable federal, state and local regulations.

### **Site Examination**

The Contractor shall visit the site and examine all structures located thereon. The specifications shall be compared with the existing field conditions. The Contractor will examine all parts of the existing structure to which new work will be connected, attached or applied, and notify Owner of any conditions detrimental to the proper and timely completion of the work.

The Contractor shall, as a part of their bid, notify L. Wagner and Associates of any discrepancies, errors, or omissions that might have been discovered in the drawings or the specifications for the purpose of making such corrections or adjustments as may be necessary. Unless specifically noted otherwise in the bid, any additional work by other trades or by the contractor that is required in order for the Contractor to finish the job will be assumed to be included in the bid price. If it should appear that any work called for in the specifications is not in accordance with State, local, or federal laws or ordinances, the Contractor shall immediately notify Owner.

The Contractor will verify all dimensions in the field and be responsible for the accurate fitting and assembly of the work.

The Contractor shall be responsible for knowing all unusual conditions or deviations that exist at the time of his/her examination and shall notify Owner.

### **Workmanship**

All materials shall be new, unless otherwise specified, and both workmanship and materials shall be of good quality. All work specified must be performed by skilled personnel and be in accordance with accepted trade standards. All materials shall be installed in compliance with manufacturers' specifications.

Prior to abatement, repairs shall be made to pre-existing conditions that may impede abatement, including water leaks and inadequate heat.

The Contractor shall be responsible for all cutting, fitting, or patching that may be required to complete the work or to make its several parts fit together properly.

In the execution of the work, the Contractor shall take all necessary precautions against damage to the existing construction, and shall keep the premises neat and clean during construction. Repairs shall be made to all surfaces damaged by the Contractor resulting from his/her work at no additional cost to the Owner.

At the completion of the work, any remaining leaded painted surfaces must be intact. There will be no chipping, peeling, cracking, flaking, chalking leaded paint and no painted surface containing lead will have any holes in it whatsoever.

### **Safety/Protection of Work**

The Contractor shall adequately protect the work, adjacent property and the public and shall be responsible for any damage or injury due to his act or neglect.

The Contractor shall be responsible for initiating, maintaining and supervising all safety precautions and programs in connection with the Work.

The Contractor shall erect and maintain, as required by existing conditions and progress of the Work, all reasonable safeguards for safety and protection, including posting danger signs and other warnings against hazards, medical surveillance of workers, personal protection for all workers (or anyone who is permitted on site), work protection procedures, and any other safety procedures as required by federal, state and local laws and regulations.

When the use or storage of explosives or other hazardous materials or equipment is necessary for the execution of the Work, the Contractor shall exercise the utmost care and shall carry on such activities under the supervision of properly qualified personnel.

### **Definitions in Specifications**

The term "Install" means to remove the existing and install new unless otherwise noted.

Where repair of existing surface is called for, the feature (floor, wall, ceiling, door, window, or trim, etc.) excluding ornamentation shall be placed in equal to new condition, taking into account the fact that old buildings cannot be made "as new" and that some lines and surfaces may remain irregular, slightly out of level or plumb, either by patching or replacement. All damaged, loosened, or rotted parts of wood, metal or plaster shall be removed and replaced and the finished work shall match adjacent work (or other work as specified in Scope of Work) in design and dimension. Such patching and replacement shall be made to blend with existing work so that the patch or replacement will be inconspicuous.

### **Materials**

Except as otherwise noted, the Contractor shall provide and pay for all materials, labor, tools, and other items necessary to complete the work. Existing materials and equipment, when determined to be serviceable and adequate as to size and capacity and in good condition, shall be reused only if specified in scope of work.

All building products and manufactured equipment shall be installed in accordance with the manufacturer's instructions.

Containment materials shall include:

1. Polyethylene (plastic) sheeting of six (6) mill thickness will be used, in sizes to minimize the frequency of joints.
2. Polyethylene bags for disposal will be six (6) mill thickness and of sufficient size for the application. Poly wrap of six (6) mill thickness may also be used.
3. Duct tape will be used that is capable of sealing joints in adjacent plastic sheets and for attachment of plastic sheet to finished or unfinished surfaces of dissimilar materials and capable of adhering under both dry and wet conditions.

The Contractor may use alternate methods, materials, and procedures to those specified at no extra cost to the Owner, if given written approval by Owner.

The Contractor shall be responsible for the storage and safety of his own materials. The Owner assumes no liability whatever for any materials damaged or stolen on the premises where such has not been brought in the building. Any damage to, or loss by theft or vandalism of any material, appurtenance or appliance, after such

has been brought into the building, applied, connected or installed shall be the sole responsibility of the Contractor until the project is completed and accepted by the Owner.

### **Changes in Work**

The Contractor shall report any unusual conditions or faulty material or construction revealed during the work to Owner. The Contractor shall not proceed with work until so directed by Owner.

All changes from the original contract shall be in writing and approved by the owner(s), contractor, and L. Wagner and Associates. Change Orders shall include description of work to be added or deleted, cost for same, and reason for change.

### **Permits/Codes/Licenses**

All Contractors under this agreement shall be fully licensed and certified as lead abatement contractors in accordance with Connecticut's regulations and shall be EPA Certified Renovators or trained by a Certified Renovator. All workers must be classroom trained to comply with HUD rules. All firms must be EPA Certified Firms.

**Permits:** All permits, unless otherwise specified, must be paid for and obtained by the Contractor. A copy of each must be on file with Owner before any work can begin or any moneys can be disbursed. This includes building, plumbing, electrical, heating, or any other permits necessary to complete a job. The contractor is responsible for identifying and obtaining all needed permits.

The Contractor shall perform all work in conformance with applicable federal, state, and local codes and ordinances whether or not covered by the Drawings or Specifications for the work.

### **Coordination of Trades**

The Contractor shall be responsible for the coordination of all trades and the satisfactory performance of the completed work.

### **Assignment of Contract**

The Contractor shall not assign this contract.

### **Communications**

The Contractor shall submit all communications regarding the work to the Owner.

### **Insurance**

The Contractor shall carry Workman's Compensation, Lead Abatement Liability Insurance, and Manufacturers and Contractor's Liability Insurance.

### **Site Documentation**

All documentation as required by local, state and federal regulations must be maintained on site and available for review.

## **XII. Execution**

### **Warning Signs:**

Prior to commencement of work, contractor will place warning signs to comply with State Standards at all entrances and exits of the work area.

### **Keep anyone other than workers out of the work area:**

Contractor will be responsible for notification. Residents must be notified 5 days in advance of when the work is to begin, in the language that they are accustomed to. The work area must be thoroughly blocked off to ensure that they cannot enter by accident. Exterior areas will be blocked off using orange construction fences during exterior abatement.

No person will enter or remain in a work area at any time during this project except for the lead abatement contractor and workers, enforcement officials and their designees, lead inspectors, and the property owner or the owner's designee. People other than those listed above may enter the work area only after the lead inspector determines that the lead abatement project has been completed.

### **Worker Protection**

Each worker and authorized visitor without exception will put on required NIOSH approved clean protective clothing before entering the work area. Each time a worker or authorized visitor leaves the work area, they will leave protective clothing in the changing area.

NIOSH approved respirators as required by Connecticut laws will be provided to workers by contractor.

Workers will not eat, drink, smoke or chew gum while in the work area.

### **Containment (Materials will all conform to specifications listed above under materials)**

Floor will be covered with 2 sheets of polyethylene, sealed completely with duct tape. Unmovable objects will be covered with one sheet of polyethylene.

Air heating and conditioning systems will be turned off and air intake and exhaust systems will be sealed with polyethylene and duct tape.

Entrances to the work area will be sealed by using 2 layers of polyethylene, with each layer attached to the top of the entrance and opposite side using duct tape.

Provide a changing area at the entrance/exit of the work area to ensure that any dust from the work area does not escape to the living areas or public areas.

Exterior work areas will have polyethylene extending three (3) feet per story being abated with a minimum of five (5) feet and a maximum of twenty (20) feet. For liquid waste, extend the end of the polyethylene a sufficient distance to contain the runoff and raise the outside edge of the sheets to trap liquid waste. Erect vertical shrouds if necessary to prevent any dust release to the neighboring areas.

### **Disposal of Lead-containing Materials**

Demolition of all parts to be removed shall be done in a safe, orderly fashion, taking care to avoid damage to parts which are to be left in place. Materials that are specified to be reused, such as doors, trim or lumber, shall be in conformance with the Connecticut Building Code. The Contractor is responsible for disposal of lead abatement waste and non-toxic waste in compliance with local, state and federal regulations. Contractor must choose one of the following methods:

1. If total project waste passes the TCLP test, the waste may be discarded as regular waste. A copy of the TCLP results must be sent to all concerned parties, including the owner, LAMPP and the local Health Department.
2. If total project waste is greater than 10 cubic yards and it fails the TCLP, the contractor must dispose of the waste through a hazardous waste disposal company. Toxic lead waste materials will be packaged in impermeable dust tight containers (i.e. 6 mil plastic bags, sealed poly wrap, or sealed fiber pack drums). All containers will be labeled with appropriate hazard warnings. The landfill accepting the wastes will be notified before shipping for scheduling to ensure that adequate personnel and apparatus are available at the time of disposal. Lead materials will be delivered in separate shipments (not transported with any other materials). A waste manifest will be used which lists the landfill, the generator and the hauler of the waste, the quantity, source, and type of lead waste to be disposed of and any other information or requirements deemed necessary. A copy will be sent to all concerned parties, including LAMPP and officials of municipalities in which lead originates and is disposed.
3. If total project waste is less than 10 cubic yards, the property owner may assume responsibility for the waste in writing as per the "Household Hazardous Waste" exemption outlined in the DEP's "Guidance for Management and Disposal of Lead Contaminated Materials Generated in the Lead Abatement, Renovation, and Demolition Industries.", documenting that the waste came from his/her property, that it contains only architectural waste (including lead waste) from his/her property, that they have a secure place in which to store the waste before disposal, and that they have a viable means to dispose of the waste in the near future.
4. If total project waste is less than 10 cubic yards and the property owner does not assume responsibility for the waste, the contractor must either perform & pass the TCLP or discard all lead waste (including any components that have been assumed to be leaded) as hazardous waste.

#### **Cleanup**

*Preliminary Cleanup* will be done by wet sweeping the containment area and carefully removing polyethylene by folding the plastic upon itself to trap all dust. After the polyethylene covering is removed, the work area will be HEPA vacuumed and then washed with detergent and rinsed with clear water.

*Final Clean-up.* To give airborne lead time to settle, the final cleanup should be scheduled to start no sooner than 24 hours after active abatement has ceased. The entire area should be HEPA vacuumed again, washed with detergent, rinsed with clear water and HEPA vacuumed once again.

#### **Testing/Clearance Testing/Monitoring**

The contractor is responsible for hiring a certified lead inspector/risk assessor to perform final clearance sampling as required. The contractor will not receive payment for this contract until the premises have passed a final clearance testing.

After final cleaning as described above, a final visual inspection by the lead inspector shall be performed. If the inspection reveals no visible dust and all surfaces in the abatement area have dried, dust wipe sampling analysis must be done. Selection of location and of samples will be responsibility of the lead inspector, but will include samples for each room in which abatement occurred. If the premises do not pass the visual inspection or the dust wipe sampling, clean-up procedures must be repeated at the Contractor's expense until all areas pass. (This expense will also include the costs of additional dust wipe sampling.)

Every building component upon which removal of lead has been performed will be tested in clearance testing using XRF, AAS, GFAAS, or ICP-AES technologies to determine that the level of a level of lead is less than toxic. If any component does not pass, the abatement must be repeated at the Contractor's expense until all areas pass. (This expense will also include the costs of additional testing.)

### **XIII. General Methods of Work and Definitions/General Material Specifications**

#### **Aluminum Trim**

Use aluminum coil stock 0.019" thick. Coil should be applied smoothly, following manufacturer's instructions. Caulk all seams and edges.

#### **Carpentry**

- All sheet rock and wood must be installed using screws of sufficient length to extend about 3/4" into a solid surface.
- Replace any rotten or deteriorated wood identified while wet scraping and preparing the exterior trim, porches, window casings or any other component that is currently wood. All replacement wood must match the existing in style.
- All exterior wood that will rest on soil or a potentially wet surface must meet building code and shall be at least number 2 grade, pressure treated, Southern yellow pine with at least a 40 year warranty against rot unless otherwise noted. Other wood must be at least paint grade pine (#2) unless otherwise noted.

#### **Doors, Exterior**

Unless otherwise noted, new exterior doors must be 1 3/4" thick 24 gauge thermally broken galvanized and bonderized steel insulated core doors, with an adjustable sill, magnetic weather stripping, and 1 1/2 pair 3 1/2 x 3 1/2 loose pin butt hinges, use Thermo-Tru Steel Foam Core Insulated Exterior Doors or approved equal. Install single cylinder deadbolt plus passage set as manufactured by Schlage or equivalent. Provide owner with 2 keys for each lock. Door shall be accurately cut and fitted to frames and must operate freely without binding. Insulate between door jambs and rough opening with spun fiberglass prior to trimming the interior of the door.

#### **Doors, Garage**

Furnish and install new overhead garage doors and any and all tracks, rails, springs, hardware, etc. to make operational. Hardware should include an outside handle and keyed lock for each door installed. The doors must be three-layer pressure bonded construction (steel + insulation + steel) construction if the garage is attached to the house; the door can be a one-layer door (steel) if the garage is detached. Owner to choose any standard color available from Manufacturer. Manufacturer's warranty must be minimum of 20 years.

Manufacturer to be Clopay or equal and meet Clopay's Premium Series specifications or equal. No automatic openers are to be included. If, however, the existing Overhead door units being replaced have automatic openers, contractor to reuse and make operable or replace with new unit(s). Submittal of Manufacturer's catalog cuts with all pertinent information, including warranty information, to be submitted to Waterbury Healthy Homes, Department of Public Health & Owner for approval prior to placing order.

#### **Doors, Interior**

Unless otherwise noted, install 1 3/8" hollow core luan door manufactured by Brosco or equivalent. Shim doors plumb, level and square. New doors shall be installed in pine jambs with 1 pair of 3" loose pin butt hinges. Fasten doors to rough framing through shims with 10-penny finish nails. Trim out both sides of new doors with finger jointed casings to match existing. Glue miters before fastening trim to jamb and wall. Fasten trim to walls with 6-penny finish nails and to jambs with 4-penny nails. Set heads of nails below surface of wood and fill with putty. Install passage set as manufactured by Schlage, Kwikset, Harlock or approved equal. If a hollow core door doesn't meet building and/or CT Fire Safety Code, install a door to meet code.

#### **Enclosure**

All surfaces to be enclosed should be stabilized by washing with detergent. All seams must be caulked in order to seal in lead dust. "LEAD" must be written every 2' on the surface to be enclosed.

## Install

“Install” means to purchase, deliver, install per manufacturer’s specifications, test, and warrant.

## Liquid encapsulant

- Liquid encapsulants can be used successfully only on non-friction surfaces. The encapsulants can be used on flooring surfaces that will be covered with carpet or rubberized flooring materials as long as manufacturers’ instructions are followed and full cure time is achieved before installing carpeting. Surfaces with dry rot or severe deterioration of the substrate are not suitable for encapsulation. See individual Connecticut approved product data sheets for specific prohibitions and recommendations.  
**Note: Color by owner.**
- *Preparation:* Any chips or cracks should be wet scraped or HEPA sanded to achieve a sound substrate and patched. **Note: Feathersand rough edges where old paint has been scraped or chipped so that final appearance is aesthetically and professionally pleasing.** Wash the surface with detergent to remove any oil or other dirt. Then test the substrate using the patch test of the liquid encapsulant on a sample surface that will be encapsulated. These tests should be performed by the property owner, a certified lead inspector, or an abatement contractor who will be performing the work.
- *Patch test:* Apply a patch that is roughly 6 inches by 6 inches of the encapsulant on *each type* of component to be painted with an encapsulant. If the paint is different from room to room, apply a patch on each different type of paint. Let it cure following manufacturer’s instructions. At the end of that time, cut an “X” in the center of the patch. Each cut line should be about 2 inches long and should go through the coating, the paint underneath it all the way down to the wood. Smooth a 3” length of 3M600 tape over the center of the “X” and rub the tape firmly with the eraser end of a pencil. After 90 seconds, remove the tape by pulling straight down with a quick smooth motion. The patch fails if more than 1/16” is removed on either side of the cuts or if encapsulant more than 1/8” away from the cuts is removed.
- Once it has been determined that the encapsulant will work, apply following the manufacturer’s instructions. Liquid encapsulant used on exterior areas must be approved for exterior use in Connecticut. Any of the approved liquid encapsulants may be used on the interior, as long as manufacturer’s instructions are followed. Note that only LeadLock and Fiberlock’s L-B-C Type III are approved for use on working radiators under 212°; full cure must be achieved before radiator is turned on.
- Top coats may be applied over the encapsulants. Follow manufacturer’s instructions before top-coating. (For example, LeadLock must be fully cured for 3-4 weeks before topcoating; Fiberlock’s L-B-C Type III must cure 12 hours before topcoating with a 100% acrylic paint.)
- Acceptable liquid encapsulation must include underlying surfaces including but not limited to surfaces under gutters, leaders and shutters (unless the underlying surfaces are enclosed with caulk/sealant)

## Other

- Prep, prime and then paint with 2 coats of paint any new or stripped component, except pressure treated wood. Pressure treated wood will be left bare. Paint should be manufactured by Benjamin Moore, or equal. Color by owner.
- All leaded surfaces that are not being replaced or encapsulated must be maintained in an intact condition. This may require patching, wet scraping, priming and painting.

## Porch Flooring

- Exterior: Tongue and groove flooring is to be 5/4” fir or 3/4” mahogany. When plywood is specified, materials to be 1/2” pressure treated. Include edge moldings to cover any exposed leaded materials. Caulk all seams. Prime and paint using sand or other non-slip additive.
- Interior: If plywood is specified, material to be 1/4” luan

- Chemical stripper: Chemical stripper recommended is IPC Safe-T-Strip or its equivalent in quality and performance. All applications will be performed according to the manufacturer's specifications, including neutralizing and rinsing surfaces as required.
- Wet scrape or wet plane: Leaded paint is scraped off down to bare substrate using the appropriate sharp tool after misting area with water.

### **Trim**

Window trim includes the casings, headers, stops, sill, and apron -- all trim around the window. Casings and jambs include the trim at the sides and the top of the windows and doors unless otherwise noted. Upper and/or lower trim include soffits, fascia, rakes, decorative trim, and any other trim on the house.

### **Vinyl Siding**

- Siding shall be of first quality manufactured by Vipco, Certainteed, or equivalent. Color by owner. Provide owner with 50 year warranty.
- Apply Amocor XP38 fanfold insulation board or equivalent, following manufacturer's instructions, to enclose lead paint.
- The lead-based painted components of attic vents should be removed and replaced, since the new attic vent will not act as a dust barrier.
- Install vinyl siding and aluminum or vinyl wrapped trim following manufacturer specifications.

### **Windows, basement replacement windows**

Remove and discard as lead waste any leaded basement windows. Furnish and install new vinyl replacement basement windows manufactured by Harvey, Mercury-Excellum or equivalent. Windows shall be installed in accordance with the manufacturer's recommendations.

### **Windows, vinyl replacement**

Furnish and install new rigid vinyl replacement windows with 5/8" Low E double-pane insulating glass and non-corroding half-height lockable fiberglass screens in aluminum frames. Windows must be energy star qualified and must carry the Energy Star Label on the product. Windows must have tilt in sashes, welded frames, cam& sash locks, and must comply with Emergency Escape requirement of the building code for all bedrooms. Windows shall be manufactured by Harvey (Classic Series), Mercury-Excellum, NorthEast (DH 100) or equivalent. Discard old weights and completely insulate weight cavities before installing new windows. Windows shall be installed in accordance with the manufacturer's recommendations. Frames and sash shall be properly adjusted for tight closure and easy operation. Frames shall be thoroughly sealed at the interfaces with the walls (inside & out) prior to completion of finish work.

**Windows (Wooden Replacement 1/1) (Historic) (Alternate #1)<sup>1</sup>:** Furnish and install new 1/1 wooden replacement windows (no cladding) with 5/8" Low E double-pane insulating glass and full fiberglass screens (Note: Contractor shall measure the bevel of the sill. If the bevel is not 14 degrees, it is normally required that the bevel be custom specified to manufacturer.). Windows shall have tilt-in sashes, cam sash locks, and shall comply with Emergency Escape requirements of the building code for all bedroom installations. Windows shall be Energy Star qualified, with a U-factor less than or equal to 0.3 ( $\leq 0.3$ ) and shall carry the Energy Star Label on the product. Windows shall be compliant with utility requirements for weatherization programs. Windows shall be manufactured by Harvey, Weathershield, Marvin, or equivalent. Unless previously approved submit manufacturer's specifications to L. Wagner and project consultant for approval prior to ordering. Windows shall be installed in accordance with the manufacturer's recommendations. Frames and sash shall be properly adjusted for tight closure and easy operation. Frames shall be thoroughly sealed at the interfaces with the walls (interior and exterior) prior to completion of finish work. If original windows have weight cavities, remove old weights and insulate the entire cavity on both sides of windows prior to installation of replacement windows. Spray foam insulation shall not be used.

**Windows (Wooden Replacement Other Than 1/1) (Historic) (Alternate #2):** Furnish and install new single-pane wooden replacement windows with full fiberglass screens (Note: Contractor shall measure the bevel of the sill. If the bevel is not 14 degrees, it is normally required that the bevel be custom specified to manufacturer.). Windows shall have tilt-in sashes, cam sash locks, and shall comply with Emergency Escape requirements of the building code for all bedroom installations. Grid pattern(s) (muntins) with external profiles shall match that of the existing windows that are being replaced. Windows shall be manufactured by Harvey, Weathershield, Marvin, or equivalent. Unless previously approved submit manufacturer's specifications to L. Wagner and project consultant for approval prior to ordering. Windows shall be installed in accordance with the manufacturer's recommendations. Frames and sash shall be properly adjusted for tight closure and easy operation. Frames shall be thoroughly sealed at the interfaces with the walls (interior and exterior) prior to completion of finish work. If original windows have weight cavities, remove old weights and insulate the entire cavity on both sides of windows prior to installation of replacement windows. Spray foam insulation shall not be used.

Attachment A  
**Summary Risk Assessment Notice**

**Address of Property that this summary notice applies to:**

716 Main St., Torrington

**Lead-based paint risk assessment description for exterior**

Date of risk assessment: 1/28/15

Summary of risk assessment results (check all that apply):

- No lead-based paint hazards were found.
- Lead-based paint hazards were found.
- The findings of the risk assessment are provided in the attached scope of work.

**Lead-based paint risk assessment description for interior of home**

Date of risk assessment: 1/28/15

Summary of risk assessment results (check all that apply):

- No lead-based paint hazards were found.
- Lead-based paint hazards were found.
- The findings of the risk assessment are provided in the attached scope of work.

} IAMB +  
Thresholds  
shared  
with  
Exterior


**Contact person:**

Owner: Catherine Kane  
716 Main St.  
Torrington, CT 06790  
860-496-7499

**Person who prepared this summary notice:**

Bob Kennedy, SafeHomes Inc.

Signature

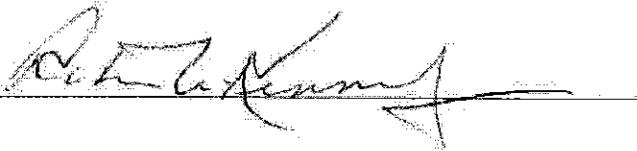

Attachment B  
**Management Plan**  
 Intact, Encapsulated, and Enclosed Surfaces

The owner will be responsible for monitoring surfaces with lead based paint to ensure surfaces do not become defective. All renovation and maintenance work must be done using lead safe work practices.

The owner must also include in their monitoring any lead based paint surfaces that are enclosed to ensure that the enclosure has not become defective and exposed the lead based painted surfaces. Monitoring will be done formally on a quarterly basis. Surfaces painted with a liquid encapsulant will be monitored on a monthly basis for the first 6 months, and annually thereafter.


Actions must be implemented as follows:

- If any leaded surfaces become defective or the enclosure over a leaded surface has exposed the old leaded surface, the owner must make the surface lead safe by painting or re-enclosing the leaded surfaces to seal them.
- All actions must be done using lead-safe work practices.
- Any doors/trim identified as leaded that start to rub must be trimmed so they open and close without rubbing.
- Any exterior leaded surfaces that were enclosed in wood or pressure treated wood must be kept painted/sealed to prevent the surfaces from deteriorating. Note that exterior grade plywood will delaminate if it is not kept painted.

Note that the lead test was done based on testing the materials on the surface. The XRF penetrates only about 3/8"; therefore there may be additional leaded surfaces below the existing walls or trim that were not accessible for testing. Any additional painted surfaces that are uncovered in the future should be assumed to be leaded (or tested for lead) and lead safe work practices should be used.

The owner will ensure that anyone who is called in to do maintenance (i.e. plumbers, electricians, and so on) on any enclosed leaded surface will be notified that they are working on a leaded surface. This notification will be in writing.

Leaded Surfaces	Condition	Method	Side
<b>Exterior</b>			
<b>Leaded Surfaces</b>			
Previously enclosed window wells	I	<i>manage</i>	<i>all</i>
Blindstops	P	enclose	all
Upper trim	P	enclose	B
Window sills (concrete)	P	encapsulate	all
Attic window sashes	P	encapsulate	B/D
Jamb/ext. jamb to Bsmt Stairs	P/P	enclose/enclose	B
<b>Front Porch</b>			
<b>Leaded Surfaces</b>			
Concrete rails, balusters	P/P	encap	A/D
<b>Garage</b>			
<b>Leaded Surfaces</b>			
Upper trim	P	enclose	all
Window/window trim	P	encapsulate	A/D
Overhead door casing to boarded-over door	P	encap	A-right



STATE OF CONNECTICUT  
DEPARTMENT OF PUBLIC HEALTH

LEAD INSPECTION AND TESTING SUMMARY FORM

This lead inspection and testing summary form must be completed and sent to the property owner of the property in accordance with Section 19a-111-3 (d) of the regulations of Connecticut State Agencies concerning Lead Poisoning Prevention and Control. A Comprehensive Lead Inspection is one performed to satisfy CGS 19a-111 (epidemiological investigation) and CGS 19a-110(d) (on-site inspection). Bare soil areas, dust and water are required to be tested for the presence of lead as part of a comprehensive lead inspection.

PROPERTY INSPECTED/TESTED

(Check): Residence  Child Day Care Center/Group Day Care Home  Family Day Care Home   
Name: \_\_\_\_\_ Name: \_\_\_\_\_

(Check One): Comprehensive Lead Inspection  Limited Testing   
Street Address: 716 MAIN ST Apt.# Single Fam. Floor: 1 + 2  
City/Town: TORRINGTON Zip Code: 06790 Telephone: 860 496 7499  
If Apartment, Number of Units: \_\_\_\_\_ Year Property Built: 1920

PROPERTY OWNER

Name: CATHERINE KANE  
Street Address: 716 MAIN ST City: TORRINGTON  
State: CT Zip Code: 06790 Telephone: 860 496-7499

INSPECTING ENTITY

A. If Consultant Contractor:

Name: SAFEHOMES  
Street Address: P.O. BOX 1125  
City: Waterbury State: CT Zip Code: 06721-1125  
Consultant License Number: 000528  
Inspector's Name: ROBERT KENNEDY Telephone: 203 591 8100  
Inspector's Certification Number: 002240

B. If Code Enforcement Agency:

Department Name: \_\_\_\_\_  
Street Address: \_\_\_\_\_  
City: \_\_\_\_\_ State: \_\_\_\_\_ Zip Code: \_\_\_\_\_  
Inspector's Name: \_\_\_\_\_ Telephone: \_\_\_\_\_  
Date of Inspector's Initial Training: \_\_\_\_\_ Date of Latest Refresher Training: \_\_\_\_\_

**INSPECTION INFORMATION**

Beginning and End Date(s) of Inspection: 1 / 28 / 15

For each day that the inspection was conducted consent was given by an adult occupant of the dwelling unit to enter and inspect all areas of the dwelling that are under the control of that individual or to which that individual has legitimate access.

Yes  No

Name of person 18 years of age or older who granted consent: CATHERINE KANE Age 718 Date: 1-28-15

Name of person 18 years of age or older who granted consent: \_\_\_\_\_ Age: \_\_\_\_\_ Date: \_\_\_\_\_

A. Were Lead-Based Surfaces Identified? (Check One)  Yes  No

If yes, complete the tables below. Data in tables may not indicate all identified lead-based surfaces.

EXTERIOR Lead-Based Surfaces	Foundation	Siding &/or Trim	Stairs &/or Stair Components	Porch &/or Porch Components	Doors &/or Trim	Windows &/or Trim	Garage &/or Garage Components
Deteriorated	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Intact	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

(X = positive location)

INTERIOR Lead-Based Surfaces	Floors	Baseboards	Walls	Ceilings	Stairs &/or Stair Components	Doors &/or Trim	Windows &/or Trim	Closet/ Cabinet Components
Deteriorated	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
Intact	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				

(X = positive location)

Were rooms, areas or components inaccessible during inspection? (Check One)  Yes  No

List any inaccessible locations: \_\_\_\_\_

B. Indicate Potential Lead Hazards Identified:

(Check All That Apply)

Was drinking water tested for lead?

Yes  No

Was dust tested for lead?

Yes  No

Was bare soil tested for lead?

Yes  No  N/A If yes, complete the adjacent table.

Lead Hazard Locations	Floors (dust)	Window Sills (dust)	Window Wells (dust)	Soil	Water	Paint (XRF)	Paint Chip
(Enter highest result for each)	<u>210.0</u>	<u>210.0</u>	<u>X</u>	<u>X</u>	<u>X</u>	<u>9.9</u>	

SNOW COVERING GROUND

Per section 19a-111-4(a) and 19a-111-2(e) of the Lead Poisoning Prevention and Control Regulations:

A lead abatement plan is required for this property:  Yes  No

A lead management plan is required for this property:  Yes  No

A lead hazard remediation plan is required for this property:  Yes  No

A lead management plan is required for this property:  Yes  No

EXCEEDS \$25,000<sup>00</sup>  
NO CHILDREN < 6 yrs.

Inspector's Signature: Robert Kennedy Date: 1 / 1 / 15

The federal Residential Lead-Based Paint Hazard Reduction Act, 42 U.S.C. 4852d, requires sellers and landlords of most residential housing built before 1978 to disclose all available records and reports concerning lead-based paint and/or lead-based paint hazards, including the test results contained or referenced in this notice, to purchasers and tenants at the time of sale or lease or upon lease renewal. This disclosure must occur even if hazard reduction or abatement has been completed. Failure to disclose these test results is a violation of the U.S. Department of Housing and Urban Development and the U.S. Environmental Protection Agency regulations at 24 CFR Part 35 and 40 CFR Part 745 and can result in a fine of up to \$11,000 per violation. To find out more information about your obligations under federal lead-based paint requirements, call 1-800-424-LEAD.

I have received a copy of this summary report from my landlord/property manager and have been informed that I can obtain further information about the testing results from the report by contacting the property owner listed above.


Resident's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

716 Main St., Torrington

For layout only; not to scale




Side C

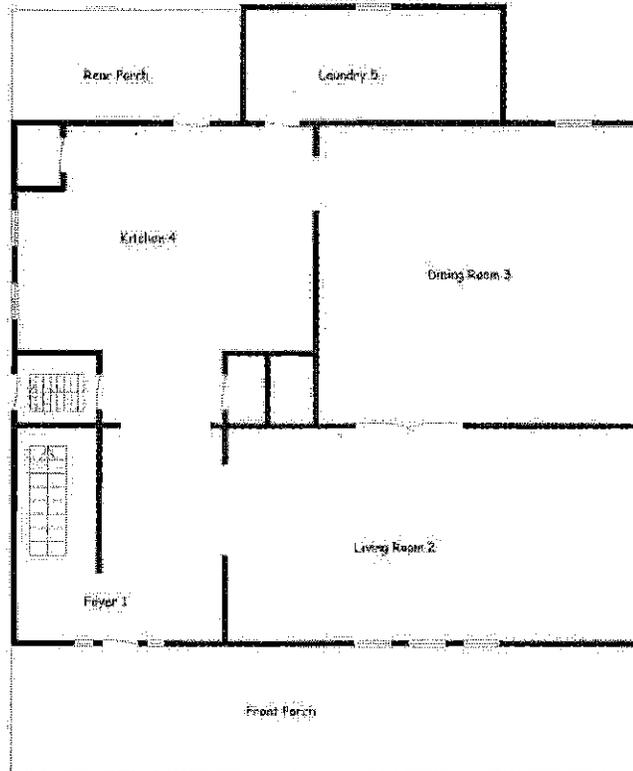

Side B

Side D

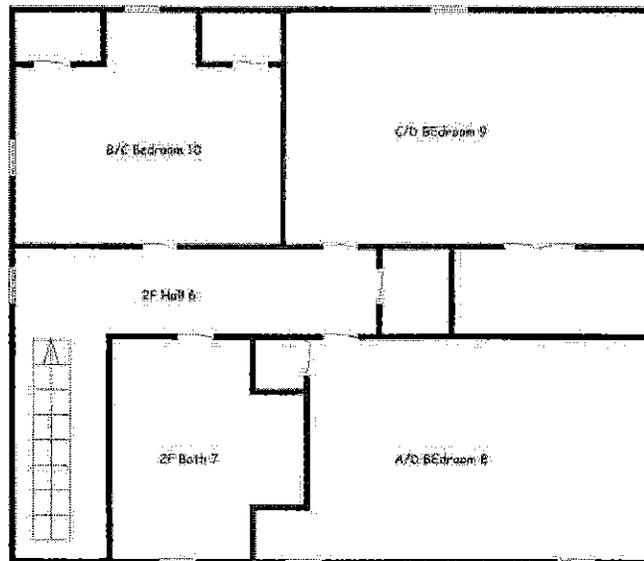

Side A



Analysis Report

# Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117  
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475

Customer: SAFE HOMES (677)  
Address: 493 Willow St.  
WATERBURY, CT 06710

Order #: 119277

Attn:  
Project:  
Location: 716 Main St  
Number:

Matrix: Wipe  
Received: 01/30/15  
Analyzed: 01/30/15  
Reported: 01/30/15

PO Number:

Sample ID	Cust. Sample ID	Location	Sample Date	Area	Total	Conc.	RL*
Parameter		Method					
119277-001	1	Foyer Floor	01/28/15				
Lead		EPA 7000B / 3050B		1.00 ft2	<10.0 µg/wipe	<10.0 µg/ft2	10.0 µg/ft2
119277-002	2	Dining Room Sill	01/28/15				
Lead		EPA 7000B / 3050B		1.00 ft2	<10.0 µg/wipe	<10.0 µg/ft2	10.0 µg/ft2
119277-003	3	Blank	01/28/15				
Lead		EPA 7000B / 3050B			<10.0 µg/wipe		10.0 µg/wipe

Analyst: MHB  
119277-01/30/15 04:18 PM

Reviewed By: Derek Jackson  
Analyst

Minimum Total Reporting Limit: 10.0 µg/wipe. EPA Clearance Std: 40 µg/ft² for floors, 250 µg/ft² for interior window sills, and 400 µg/ft² for window troughs. All internal QC parameters were met. Unusual sample conditions, if any, are described. Surrogate Spike results designated with "D" indicate that the analyte was diluted out. "MI" indicates matrix interference. Concentration and \*Reporting Limit (RL) based on areas provided by client. Values are reported to three significant figures. The analysis data reported relates only to the samples as submitted.

# LEAD PAINT INSPECTION REPORT

REPORT NUMBER: S#01123 - 01/28/15 14:20

INSPECTION FOR: Catherine Kane  
716 Main St.  
Torrington, CT 06790


PERFORMED AT: 716 Main St.  
Torrington, CT 06790

INSPECTION DATE: 01/28/15

INSTRUMENT TYPE: R M D  
MODEL LPA-1  
XRF TYPE ANALYZER  
Serial Number: 01123

ACTION LEVEL: 1.0 mg/cm<sup>2</sup>

OPERATOR LICENSE: IR002240

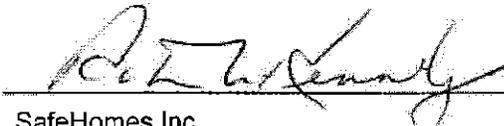SIGNED: 

SafeHomes Inc.  
Bob Kennedy  
PO Box 1125  
Waterbury, CT 06721-1125

Date: 1-31-15

**SUMMARY REPORT OF LEAD PAINT INSPECTION FOR: Catherine Kane**

Inspection Date: 01/28/15 716 Main St.  
 Report Date: 1/31/2015 Torrington, CT 06790  
 Abatement Level: 1.0  
 Report No. S#01123 - 01/28/15 14:20  
 Total Readings: 155 (Partial) Actionable: 15  
 Job Started: 01/28/15 14:20  
 Job Finished: 01/28/15 15:29

Reading No.	Wall	Structure	Location	Member	Paint Cond	Substrate	Color	Lead (mg/cm <sup>2</sup> )	Mode
<b>Exterior Room 001 Exterior</b>									
144	B	Window	Ctr	Sill	D	Concrete		3.6	QM
<b>Exterior Room 002 Front Porch</b>									
138	A	Railing	Ctr	Balusters	D	Concrete		2.1	QM
142	C	Window	Rgt	Sill	D	Concrete		1.4	QM
134	C	Threshold	Lft		D	Concrete		1.0	QM
135	C	Kickplate	Lft		D	Concrete		1.0	QM
<b>Exterior Room 003 Rear Porch</b>									
153	A	Threshold	Lft		D	Concrete		1.0	QM
154	A	Kickplate	Lft		D	Concrete		1.4	QM
<b>Exterior Room 004 Garage</b>									
149	A	Window	Ctr	Lft casing	D			2.4	QM
		plywood over window							
146	A	Upper Trim	Lft		D			1.4	QM
151	A	OvrHdDrCang	Rgt		D			1.4	QM
<b>Interior Room 002 Living Rm</b>									
027	D	Window	Ctr	Well	I	Aluminum		3.5	QM
Comment: Carpet on floor. Ceiling paneled.									
<b>Interior Room 005 Laundry</b>									
058	C	Window	Ctr	Well	I	Aluminum		2.5	QM
Comment: Linoleum on floor. Lower walls paneled. ceiling paneled.									
<b>Interior Room 007 2F Bath</b>									
090	A	Window	Ctr	Well	I	Aluminum		9.3	QM
Comment: Linoleum on floor. No baseboards. Ceiling paneled.									
<b>Interior Room 011 Bsmt Stairs</b>									
129	B	Door	Rgt	Rgt jamb	D			1.0	QM
130	B	Ext Jamb	Rgt		D			>9.9	QM
---- End of Readings ----									

**DETAILED REPORT OF LEAD PAINT INSPECTION FOR: Catherine Kane**

Inspection Date: 01/28/15 716 Main St.  
 Report Date: 1/31/2015 Torrington, CT 06790  
 Abatement Level: 1.0  
 Report No. S#01123 - 01/28/15 14:20  
 Total Readings: 155 (Partial)  
 Job Started: 01/28/15 14:20  
 Job Finished: 01/28/15 15:29

Reading No.	Wall	Structure	Location	Member	Paint Cond	Substrate	Color	Lead (mg/cm <sup>2</sup> )	Mode
<b>Exterior Room 001 Exterior</b>									
144	B	Window	Ctr	Sill	D	Concrete		3.6	QM
145	C	Window	Ctr	Sill	D	Concrete		0.3	QM
<b>Exterior Room 002 Front Porch</b>									
138	A	Railing	Ctr	Balusters	D	Concrete		2.1	QM
136	A	Railing	Ctr	Railing	D	Brick		-0.2	QM
137	A	Railing	Ctr	Railing	D	Brick		0.7	QM
139	A	Railing	Ctr	Railing	D	Concrete		0.3	QM
140	A	Column Base	Rgt		D	Concrete		0.0	QM
141	A	Floor	Rgt		I	CeramoTile		-0.2	QM
142	C	Window	Rgt	Sill	D	Concrete		1.4	QM
143	C	Window	Rgt	Lft casing	I			0.0	QM
133	C	Door	Lft	Lft casing	D			0.0	QM
134	C	Threshold	Lft		D	Concrete		1.0	QM
135	C	Kickplate	Lft		D	Concrete		1.0	QM
<b>Exterior Room 003 Rear Porch</b>									
152	A	Door	Lft	Lft casing	D			0.0	QM
153	A	Threshold	Lft		D	Concrete		1.0	QM
154	A	Kickplate	Lft		D	Concrete		1.4	QM
155	C	Column Base	Lft		D	Concrete		0.3	QM
<b>Exterior Room 004 Garage</b>									
149	A	Window plywood over window	Ctr	Lft casing	D			2.4	QM
146	A	Upper Trim	Lft		D			1.4	QM
147	A	OvrHdDrJamb	Lft		D			-0.1	QM
148	A	OvrHdDrCsng	Lft		D			-0.2	QM
150	A	Window	Ctr		D	Plywood		0.0	QM
151	A	OvrHdDrCsng	Rgt		D			1.4	QM
<b>Interior Room 001 Foyer</b>									
004	A	Wall	U Rgt		I			0.1	QM
011	A	Door	Ctr	Rgt jamb	I			-0.2	QM
010	A	Door	Ctr	Rgt casing	I			-0.1	QM
009	A	Door	Ctr	U Ctr	I	Metal		-0.1	QM
019	A	Stairs	Ctr	Wall	I			-0.1	QM
012	A	Ext Jamb	Ctr		I			-0.2	QM
013	A	Ext Door	Ctr		I			0.0	QM
008	B	Wall	L Rgt		I			0.1	QM
015	B	Stairs	Lft	Wall	I			-0.1	QM

DETAILED REPORT OF LEAD PAINT INSPECTION FOR: Catherine Kane

Reading No.	Wall	Structure	Location	Member	Paint Cond	Substrate	Color	Lead (mg/cm <sup>2</sup> )	Mode
014	B	Stairs	Lft	Baseboard	I			-0.3	QM
007	C	Wall	U Lft		I			-0.2	QM
016	C	Stairs	Ctr	Newel post	I			0.0	QM
017	C	Stairs	Ctr	Balusters	I			0.1	QM
005	D	Wall	U Ctr		I			-0.1	QM
006	D	Baseboard	Ctr		I			0.0	QM
018	D	Stairs	Ctr	Wall	I			-0.1	QM

Comment:

Carpet on floor. Ceiling paneled.

Interior Room 002 Living Rm

020	A	Wall	U Rgt		I			-0.1	QM
021	B	Wall	U Lft		I			0.1	QM
022	C	Wall	U Ctr		I			-0.1	QM
029	C	Door	Lft	U Ctr	I			0.0	QM
023	D	Wall	U Lft		I			-0.2	QM
024	D	Window	Ctr	Rgt casing	I			-0.1	QM
026	D	Window	Ctr	Sash	I			-0.1	QM
027	D	Window	Ctr	Well	I	Aluminum		3.5	QM
025	D	Window	Ctr	Sill	I			0.0	QM
028	D	ExtSash	Ctr		D			-0.1	QM

Comment:

Carpet on floor. Ceiling paneled.

Interior Room 003 Dining Rm

030	A	Wall	U Ctr		I			0.1	QM
037	A	Door	Rgt	U Ctr	I			0.0	QM
031	B	Wall	U Lft		I			-0.2	QM
032	C	Wall	U Lft		I			-0.2	QM
033	D	Wall	U Lft		I			-0.1	QM
036	D	Window	Ctr	Sash	I			0.1	QM
035	D	Window	Ctr	Sill	I			-0.2	QM
034	D	Window	Ctr	Lft casing	I			0.0	QM

Comment:

Carpet on floor. lower walls paneled. ceiling paneled.

Interior Room 004 Kitchen

040	A	Wall	U Ctr		I	CeramicTile		-0.3	QM
038	A	Ceiling			I			0.0	QM
041	B	Wall	U Ctr		I	CeramicTile		0.4	QM
043	B	Window	Ctr	Sill	I			-0.1	QM
042	B	Window	Ctr	Lft casing	I			-0.1	QM
065	B	Door	Lft	Rgt jamb	I			-0.1	QM
064	B	Door	Lft	U Ctr	I			-0.1	QM
049	B	Door	Rgt	U Ctr	I			-0.1	QM
050	B	Closet	Rgt	Wall	I			-0.1	QM
039	C	Wall	U Ctr		I			-0.1	QM
046	C	Door	Rgt	Rgt jamb	I			0.0	QM
044	C	Door	Rgt	Rgt casing	I			-0.2	QM

DETAILED REPORT OF LEAD PAINT INSPECTION FOR: Catherine Kane

Reading No.	Wall	Structure	Location	Member	Paint Cond	Substrate	Color	Lead (mg/cm <sup>2</sup> )	Mode
045	C	Door	Rgt	U Ctr	I			0.0	QM
047	C	Ext Jamb	Rgt		D			-0.1	QM
048	C	Ext Door	Rgt		D			0.0	QM
063	D	Closet	Rgt	Wall	I			-0.2	QM

Comment:

Linoleum on floor. Lower walls paneled.

Interior Room 005 Laundry

051	A	Wall	U Ctr		I			-0.1	QM
061	A	Door	Rgt	Rgt jamb	I			-0.2	QM
060	A	Door	Rgt	Rgt casing	I			0.0	QM
062	A	Door	Rgt	U Ctr	I			0.0	QM
054	B	Wall	U Rgt		I			-0.1	QM
053	C	Wall	U Rgt		I			0.0	QM
057	C	Window	Ctr	Sash	I			0.0	QM
058	C	Window	Ctr	Well	I	Aluminum		2.5	QM
056	C	Window	Ctr	Sill	I			-0.1	QM
055	C	Window	Ctr	Lft casing	I			0.0	QM
059	C	ExtSash	Ctr		D			0.1	QM
052	D	Wall	U Ctr		I			-0.1	QM

Comment:

Linoleum on floor. Lower walls paneled. ceiling paneled.

Interior Room 006 2F Hall

071	A	Wall	L Ctr		I			0.2	QM
073	A	Ceiling			I			-0.2	QM
066	B	Window	Ctr	Sash	I			-0.1	QM
067	B	Window	Ctr	Sill	I			0.0	QM
068	B	Window	Ctr	Lft casing	I			-0.1	QM
070	C	Wall	U Lft		I			-0.1	QM
069	C	Baseboard	Lft		I			0.0	QM
072	D	Wall	U Lft		I			-0.1	QM
076	D	Door	Ctr	Rgt jamb	I			0.0	QM
074	D	Door	Ctr	Rgt casing	I			0.1	QM
075	D	Door	Ctr	U Ctr	I			-0.1	QM
077	D	Closet	Ctr	Wall	I			-0.1	QM
078	D	Closet	Ctr	Shelf	I			0.0	QM

Comment:

Carpet on floor.

Interior Room 007 2F Bath

080	A	Wall	L Ctr		I	CeramicTile		0.3	QM
079	A	Wall	U Ctr		I			-0.1	QM
089	A	Window	Ctr	Sash	I			-0.1	QM
090	A	Window	Ctr	Well	I	Aluminum		9.3	QM
088	A	Window	Ctr	Sill	I			0.1	QM
087	A	Window	Ctr	Lft casing	I			0.1	QM
091	A	ExtSash	Ctr		D			-0.1	QM
081	B	Wall	U Lft		I			-0.1	QM

DETAILED REPORT OF LEAD PAINT INSPECTION FOR: Catherine Kane

Reading No.	Wall	Structure	Location	Member	Paint Cond	Substrate	Color	Lead (mg/cm <sup>2</sup> )	Mode
082	C	Wall	U Lft		I			-0.1	QM
085	C	Door	Ctr	Rgt jamb	I			0.0	QM
084	C	Door	Ctr	Rgt casing	I			0.1	QM
086	C	Door	Ctr	U Ctr	I			-0.2	QM
083	D	Wall	U Lft		I			-0.1	QM

Comment:

Linoleum on floor. No baseboards. Ceiling paneled.

Interior Room 008 A/D Bedroom

092	A	Wall	U Lft		I			-0.1	QM
098	A	Window	Lft	Sash	I			0.2	QM
097	A	Window	Lft	Sill	I			-0.1	QM
096	A	Window	Lft	Lft casing	I			0.1	QM
093	B	Wall	U Lft		I			0.1	QM
101	B	Door	Rgt	Rgt jamb	I			0.0	QM
099	B	Door	Rgt	Rgt casing	I			0.1	QM
100	B	Door	Rgt	U Ctr	I			-0.1	QM
102	B	Closet	Rgt	Wall	I			-0.1	QM
094	C	Wall	U Ctr		I			-0.1	QM
095	D	Wall	U Rgt		I			-0.1	QM

Comment:

Carpet on floor. lower walls paneled. Ceiling paneled.

Interior Room 009 C/D Bedroom

103	A	Wall	U Ctr		I			-0.1	QM
113	A	Door	Lft	Rgt jamb	I			-0.2	QM
111	A	Door	Lft	Rgt casing	I			-0.1	QM
112	A	Door	Lft	U Ctr	I			0.0	QM
114	A	Closet	Lft	Wall	I			-0.1	QM
104	B	Wall	L Lft		I			0.0	QM
105	C	Wall	U Rgt		I			-0.1	QM
106	D	Wall	L Lft		I			-0.1	QM
109	D	Window	Ctr	Sash	I			-0.2	QM
108	D	Window	Ctr	Sill	I			-0.1	QM
107	D	Window	Ctr	Lft casing	I			-0.1	QM
110	D	ExtSash	Ctr		D			-0.1	QM

Comment:

Carpet on floor. Ceiling paneled.

Interior Room 010 B/C Bedroom

116	A	Wall	U Ctr		I			-0.1	QM
115	A	Ceiling			I			-0.1	QM
117	B	Wall	U Rgt		I			-0.2	QM
118	C	Wall	U Lft		I			-0.1	QM
124	C	Window	Ctr	Sash	I			0.1	QM
123	C	Window	Ctr	Sill	I			-0.1	QM
122	C	Window	Ctr	Lft casing	I			0.1	QM
120	C	Door	Lft	Rgt jamb	I			-0.2	QM
119	C	Door	Lft	U Ctr	I			-0.1	QM

DETAILED REPORT OF LEAD PAINT INSPECTION FOR: Catherine Kane

Reading No.	Wall	Structure	Location	Member	Paint Cond	Substrate	Color	Lead (mg/cm <sup>2</sup> )	Mode
121	C	Closet	Lft	Wall	I			-0.2	QM
125	D	Wall	U Lft		I			-0.1	QM

Comment:

Carpet on floor.

Interior Room 011 Bsmt Stairs

129	B	Door	Rgt	Rgt jamb	D			1.0	QM
128	B	Door	Rgt	U Ctr	I			0.0	QM
126	B	Stairs	Ctr	Treads	D			-0.1	QM
127	B	Stairs	Ctr	Risers	D			0.1	QM
130	B	Ext Jamb	Rgt		D			>9.9	QM
131	B	Ext Door	Rgt		D			0.8	QM
132	B	Threshold	Rgt		D	Concrete		-0.1	QM

Calibration Readings

001								0.9	TC
002								0.9	TC
003								0.8	TC

---- End of Readings ----



**Catherine Kane**  
**716 Main Street**  
**Torrington CT 06790**  
**Project # 143-351**

**General Construction Notes**

1. The Contractor shall perform the work to accommodate to the greatest extent reasonable the normal use of the premises by the Owner during the construction period.
2. It is the Owners intention to proceed with the dwelling occupied during the entire construction project. Coordinate with the Owner in all construction operations to minimize conflict, and to facilitate the Owner usage of the dwelling, parking, and access to the building. Working hours are Monday – Saturday 7:30 AM – 5:00 PM unless otherwise agreed to by the Owner.
3. The Contractor shall maintain containment within the work area when performing lead based paint reduction activities as required, until such time as clearance is received.
4. The Contractor shall coordinate any and all short-term interruptions or shutdowns with the Owner prior to commencing.
5. The Contractor shall take every precaution to ensure the safety of the occupant(s) during all phases of construction. The Contractor shall to the greatest extent reasonable maintain a least one exit for access. Coordinate restrictions and closures with Owner.
6. The Contractor shall be responsible for protecting the dwelling and contents from weather and or physical damage during construction.
7. The Contractor shall be responsible for any damage caused to the building and or contents caused by lack of said protection to the dwelling or contents until completion of the contract at no additional cost to the Owner.
8. The Contactor will be responsible for the movement of the owner's furnishings as required to facilitate the proposed work The Owner is responsible for the movement and safe keeping of valuable personal items and kick-knacks.
9. The Contractor shall assume full responsibility for the protection and safekeeping of his materials and products under this Contract stored on the site. The Contractor shall move any stored products under the Contractor's control which interfere with operations of the Owner.
10. Plants, shrubs, and lawn areas are to be protected from damage and debris. Repair and/ or replacement of all damage to existing landscaping shall be done at no additional cost to the Owner.

**Catherine Kane**  
**716 Main Street**  
**Torrington CT 06790**  
**Project # 143-351**

### **Project Meetings**

1. The selected Contractor shall attend a contract signing and pre-construction meeting as scheduled by the Owner and Project Manager.
2. The selected Contractor shall attend periodic job meetings during the course of construction, on site, as required.

### **Product and Execution**

1. Workers shall be experienced and skillful in performing the work assigned to them.
2. Contractor shall verify critical dimensions, operations and functions in the field before ordering or fabricating items which must fit adjoining construction. The Contractor shall verify all existing conditions and dimensions prior to the work. Any and all discrepancies shall be reported to the Owner and Project Manager prior to ordering any materials or performing the work.
3. The Contractor shall follow manufacturer's instructions for assembly, installation and product adjustment. In the event of conflicting specifications the specifications of the manufacturer shall prevail.
4. The Contractor shall notify the Owner and Project Manager, within 24 hours of discovery, in the event unforeseen circumstances. If the work is deemed additional or extra by the Project Manager then a change order will be negotiated, executed and authorized by the Contractor, Owner and Project Manager prior to the commencement of the work. Any work performed prior to the execution of a change order may not be considered for payment.
5. The specifications do not attempt to detail every task and procedure required to perform the work in full. The Contractor shall perform the work as required to complete the work in a professional manner using customary trade practices and standard work practices.

### **Removal of Debris and Site Maintenance**

1. The contractor shall include in their bid the cost of trash containers and the removal and lawful disposal of said debris off site as required.
2. The Contractor shall coordinate with the Owner for the placement of trash containers if necessary prior to the start of demolition.
3. The Contractor shall be responsible for the daily clean up and maintenance of the site. All debris, construction materials, scrap, rubbish etc. shall be placed in a trash container or dumpster on a daily basis. Sidewalks, driveways and pedestrian ways shall be clean and free of debris at the end of each day.

**Catherine Kane**  
**716 Main Street**  
**Torrington CT 06790**  
**Project # 143-351**

4. The Owner shall not place anything in the dumpster without prior approval from the Contractor.

#### **Material Delivery, Storage and Handling**

1. The Contractor shall determine and comply with manufacturer's recommendation on product handling, storage installation and protection.
2. Products shall be delivered to the job site in their manufacturers' original containers, with labels intact and legible. Do not deliver materials to job site until they can be properly protected.
3. Maintain packaged materials with seals unbroken and labels intact until time of use.
4. The Owner and or Project Manager may reject materials and products which do not bear identification satisfactory to the Owner or Project Manager

#### **Submittal**

The following list of submittals is for the convenience of all parties concerned it is not necessarily a complete list of all submittals required.

1. Submit the following before the start of work:
  - a. Copy of building permit.
  - b. Material submittals.
2. Submittals before Certificate of Completion and final payment.
  - a. Acceptance of work from local Building Official.
  - b. All warranty and guarantee information.
  - c. Signed and notarized lien waivers from first tier subcontractors and suppliers.
  - d. TCLP and lead clearance test results if required.

#### **Warranties and Guarantees**

1. The Contractor shall issue the Owner a written Notice of Guarantee after the date of receipt of Certificate of Completion. Submit to the Owner on letterhead in the following form:  
Name of Project and date  
I/We, (FIRM NAME), hereby warrant, and guarantee workmanship on labor for the renovations performed at \_\_\_\_\_, CT as per contract signed on \_\_\_\_\_ for a period of ONE (1) YEAR from the date of the Certificate of Completion.  
Signed  
Dated

**Catherine Kane  
716 Main Street  
Torrington CT 06790  
Project # 143-351**

## **ROOFING AND VENTILATION**

### **GENERAL**

1. Work in this section shall be governed by the Contract Documents. Contractor shall provide all materials, labor, equipment and services necessary, to perform and complete the work specified herein and or as required by job conditions.

### **INTENT**

1. The intent of the proposed work is to remove and dispose of all roofing materials from the house and garage, the front and rear porch roofs are not being replaced.
2. Provide and install 30 year rated, architectural, strip type shingles including but not limited to metal rake and drip edging, ice & water shield, shingle underlayment, ridge vents, plumbing boots, and flashings.

### **REFERENCES**

1. ASTM D 224 - Standard Specifications for Smooth Surfaces Asphalt Roll Roofing
2. ASTM D226 - Standard Specifications for Asphalt Saturated Organic Felt used in Roofing & Waterproofing
3. ASTM D 3018 - Standard Specification for Class A Shingles Surfaced with Mineral Granules.
4. ASTM 3161 - Standard Test Method for Wind Resistance of Asphalt Shingles ( Fan Induced Method)
5. ASTM 3462 - Standard Specification for Asphalt Shingles Made from Glass felt and Surfaced with Mineral Granules.
6. ASTM 4586 - Standard Specification for Asphalt Roof Cement, Asbestos Free
7. ASTM D4869 - Standard Specification for Asphalt – Saturated Organic Felt Shingle Underlayment used in roofing.
8. ASTM D 6757 - Standard Specifications for Inorganic Underlayment for Use with Steep Slope Roofing
9. ASTM E 108 - Standard Test Methods for Fire Tests of Roof Coverings.

**Catherine Kane**  
**716 Main Street**  
**Torrington CT 06790**  
**Project # 143-351**

**MATERIALS**

1. Rake & Drip Edge – White aluminum rake & drip. Drip edge shall be 5” wide.
2. Underlayment - . GAF “Shingle Mate” or approved equal for strip type shingles and GAF “Roof Pro” for SBS roofing application. Underlayment shall conform to ASTM - D226, Type 1 or ASTM D4869 type 1.
3. Leak Barrier - GAF “Weather Watch” mineral surfaced leak barrier or approved equal. Material shall conform to the requirements of ASTM D 1970. Thickness to be min. 40 mils. Tensile strength MD (lbf/in) minimum 25.
4. Starter Strip Shingles shall be Pro Start eave and rake starter strip as manufactured by GAF or approved equal.
5. Laminated fiberglass – shall be GAF Timberline HD Shingles or approved equal. Shingles shall carry Underwriter's Laboratories labels, UL® 790 Class A Fire Resistance, UL® 997, Wind Resistance and ASTM D3462. Shingles shall be Class A, strip type, self sealing
6. Hip and ridge shingles shall be Seal – A – Ridge, ridge cap shingles as manufactured by GAF or approved equal
7. Ridge Vent - GAF “Cobra Ridge Vent, or approved equal.
8. Fasteners - Aluminum or galvanized sharp pointed conventional roofing nails with smooth shanks, minimum 3/8” diameter head and of sufficient length to penetrate 3/4” into solid decking or penetrate through plywood sheathing. Provide 6 nails per full shingle. Staples are not acceptable.
9. Roof boots/ Flashing Vents - EPDM rubber-aluminum boots.
10. Flashing cement - trowel grade non asbestos mineral- fibered roofing mastic ASTM D-2822 Type 1 and ASTM D-4586 Type 1, equivalent to Karnak.
11. Step and roll flashing - Aluminum 0.040” thick, color mill finish.
12. Chimney flashing – step and counter flashing, lead flashing.

**Catherine Kane  
716 Main Street  
Torrington CT 06790  
Project # 143-351**

### **SHINGLE REMOVAL**

1. Remove and legally dispose of existing roofing materials such as but not limited to, roof boots, roof vents, plumbing boots, flashing materials, rake and drip edge, felt paper and fasteners from roof.
2. Contractor shall remove only as much material as can be replaced in a single work day. Contractor shall be responsible for any water damage to the structure and to Owners' property as a result of inadequate protection.
3. Removal work shall be done in a manner and by such means as is necessary to protect the buildings from damage; to cause minimum interruption to activities; to avoid hazard or injury to persons or property during the entire construction project.
4. Inspect roof sheathing, if after shingle removal decking surfaces are determined to be inappropriate for installation of new roofing, Contractor shall notify the Owner & Consultant of any decking which requires replacement.

***Unit Price #1: Remove existing damaged or rotted decking and install new ½" plywood decking. Provide APA exterior exposure plywood. Include all required labor and materials in cost per 4' X 8' sheet. Do not include in base bid***

\$ \_\_\_\_\_ / 4 x 8 sheet

### **PREPARATION OF ROOF DECK**

1. The contractor shall inspect the entire area to be roofed and verify it is clean and free of debris, nails, or any other item which may cause interference with the installation of the new roofing materials.
2. Install a minimum of two (2) courses of ice & water shield along all eaves extending a minimum of 24" beyond heated wall. Install full coverage ice & water barrier on any roof with less than a 4"/12" pitch.
3. Install full sheet of ice & water barrier centered in valleys allowing for 18" overlap onto either roof deck. Overlap minimum of 6" at head laps.
4. Install (18") eighteen inch wide strip of ice & water barrier along the rakes. Overlap and seal joints a minimum of 6".
5. Install a minimum of 18" x 18" piece of ice & water shield around any roof penetrations such as vent, hoods, plumbing stacks etc.
6. Install new metal rake and drip edge on all rakes and eaves. Fasten new metal edging every 8" on center using approved fasteners.

**Catherine Kane**  
**716 Main Street**  
**Torrington CT 06790**  
**Project # 143-351**

7. Install roofing underlayment over all roof decks to receive new roofing. Lap each course a minimum of 6" over lower course, and side lapping 4" at all joints.
8. Install underlayment on remaining areas of roof upon completion of installing ice & water barrier.

### **SHINGLE ROOFING**

1. Install roofing as follows:
2. Install starter course along eaves per manufacturer's written instructions.
3. Install shingles per manufacturer's written instructions. Apply six nails per full shingle. Fasten shingles at or below nailing line. Maintain six inch (6") clearance from butt end of proceeding course with any fasteners. Install shingles to meet wind zone requirements per the local building code.
4. Contractor shall provide one additional unbroken bundle of shingles identical to those installed for the Owners usage in the event of future need.

### **VALLEY**

1. Valleys shall be constructed using a closed cut style installation. Install shingles as per shingle manufacturer's written instructions. Install shingles on smaller area of roof and extend a minimum of 24" beyond center of valley. Contractor shall not nail within the valley. Over lay shingles from larger area of roof over new valley shingles and cut to form straight line centered in valley.

### **ROOF BOOTS**

1. Replace existing roof boots and install EPDM rubber-aluminum roof boots on all plumbing vents as existing. Boot shall have soft rubber gasket.

### **RIDGE VENT**

1. Cut through roof sheathing parallel with ridge down approximately 1" on either side of ridge board.
2. Provide and install Cobra-Roll Vent or approved equal in accordance with manufacturer's installation instructions.
3. Cap over new vent with roofing manufacturers ridge cap shingles. Fasten with appropriate sized galvanized roofing nails.

**Catherine Kane  
716 Main Street  
Torrington CT 06790  
Project # 143-351**

**FLASHING**

1. Provide and install aluminum 5" x 7" step flashing as required at gable walls. Contractor may re-use existing flashing to greatest extent possible.

**CHIMNEY FLASHING**

1. Remove and dispose of existing step flashing at all chimneys.
2. Provide and install new lead step flashing as required for water tight installation.

**Cost: \$ \_\_\_\_\_**

**Catherine Kane**  
**716 Main Street**  
**Torrington CT 06790**  
**Project # 143-351**

## **WINDOWS**

### **GENERAL**

1. Work in this section shall be governed by the Contract Documents. Contractor shall provide all materials, labor, equipment and services necessary, to perform and complete the work specified herein and or as required by job conditions.

### **INTENT**

1. The intent of the proposed work is to remove and dispose of the existing windows throughout the house, excluding the 4 - existing attic windows.
2. Re-glaze and paint the 4 - existing attic windows, which are identified as lead hazards in the enclosed lead abatement plan.

### **MANUFACTURERS**

1. Harvey Building Product. Waltham, MA 1-800-598-5400 [www.harveyind.com](http://www.harveyind.com) or approved equal.
2. Mercury Excelum, East Windsor, CT 1-800-292-1802 [www.mercuryexcelum.com](http://www.mercuryexcelum.com) or approved equal.

### **QUALITY ASSURANCE**

1. Manufacturer Qualifications: Minimum ten (10) years producing vinyl (PVC) windows.
2. Source Limitations: Obtain window units from one manufacturer through a single source.
3. Provide window units independently tested and found to be in compliance with ANSI/AAMA/NWDA 101/I.S.2-97 and current A440-05 performance standards listed above.
4. Code Compliance: Provide windows that are labeled in compliance with the jurisdiction having authority over the project.
5. Energy Star Rated- windows shall carry Energy Star Rating.

**Catherine Kane**  
**716 Main Street**  
**Torrington CT 06790**  
**Project # 143-351**

### **VINYL REPLACEMENT WINDOW FEATURES**

1. Provide and install replacement windows as specified below.
2. Replacement windows shall match original size and configuration unless otherwise specified.
3. Window frames shall be nominal 0.070 inch (1.8mm) thick polyvinyl chloride (PVC) with miter cut and fusion welded corners. Contoured sash design shall be a nominal 0.070 inch (1.7mm) thickness with fusion welded corners. Color: White.
4. Glazing: Low E, 5/8 inch (22mm) nominal thickness, insulated glass units are silicone glazed with an exterior glazing bead.
5. Specified fenestration with the following characteristics:
  - a. U-Factor: Less than or equal to 0.30
  - b. Solar Heat Gain Coefficient: Less than or equal to 0.50
6. Sash Balances: Block and tackle, complying with AAMA-902. Balance cords shall be anchored to locking terminal housings when the sash is tilted in.
7. Weather Stripping: In compliance with AAMA 701.2.
8. Screens: Half screen, with extruded aluminum frame and 18 x 16 charcoal finished fiberglass mesh screening.
9. No window grills are to be included in the window configuration.

### **INSTALLATION**

1. Remove existing draperies and reinstall upon window installation as required.
2. Provide and install windows in accordance with manufacturer's installation instructions.
3. Install windows plumb, level and square so as to operate freely and latch securely.
4. Install spun fiberglass insulation within window header and under sill prior to installing window. Insulate between wooden window jambs and vinyl replacement window using spun fiberglass insulation.
5. Re-install stops and fasten with appropriately sized finish nails. Set heads below surface and fill with wood filler. Caulk around remaining window stops and along sill using Phenoseal silicone caulk or approved equal.

**Catherine Kane**  
**716 Main Street**  
**Torrington CT 06790**  
**Project # 143-351**

6. Wrap exterior window casings and blind stops with white coil stock aluminum.
7. Contractor is to reframe one opening in each bedroom to meet egress code (if applicable). It is recommended that the sill of the window be lowered to meet code, but header width adjustment may be necessary to accommodate opening reconfiguration. Contractor is responsible to adjust interior and exterior finishes as to match original. Verify egress window location with owner before adjustment. Contractor is to verify egress requirements with the Towns Building Official before submitting the bid.

**Cost: \$** \_\_\_\_\_

**Catherine Kane**  
**716 Main Street**  
**Torrington CT 06790**  
**Project # 143-351**

**DOORS**

**GENERAL**

1. Work in this section shall be governed by the Contract Documents. Contractor shall provide all materials, labor, equipment and services necessary, to perform and complete the work specified herein and or as required by job conditions.

**INTENT**

1. The intent of the proposed work is to remove and dispose of the existing doors and install new doors as specified below.

**Door Schedule**

<i>Location</i>	<i>Type</i>	<i>Size</i>	<i>Swing</i>	<i>Lockset</i>	<i>Hardware</i>
B - Side House Entry	Fiberglass entry 2 - lite 4 - panel	Match Original	VIF	Schlage Plymouth Keyed Entry F-51- PLY-505 & deadbolt	As supplied by manufacturer
A - Side Garage Entry Replacing Storm Door	Fiberglass entry 2 - lite 4 - panel	Match Original	VIF	Schlage Plymouth Keyed Entry F-51- PLY-505 & deadbolt	As supplied by manufacturer
B - Side House Entry Storm	2/3 height self-storing	Match Original	VIF	Push button	As supplied by manufacturer
C - Side House Entry Storm	2/3 height self-storing	Match Original	VIF	Push button	As supplied by manufacturer

**DOOR MANUFACTURERS**

1. Masonite International Door Company, One Tampa City Center, 201 N. Franklin Street, Tampa, FL, Tel: 1-800-895-2723, [www.masonite.com](http://www.masonite.com) or approved equal.
2. JELD-WEN Door Systems PO Box 1329 Klamatha Falls, OR 97601, Tel: 1-800-535-3936, [www.jeld-wen.com](http://www.jeld-wen.com) or approved equal.
3. Therma-Tru, 1750 Indian Wood Circle, Maumee, Ohio 43537. Tel: 800-843-7628. <http://www.thermatru.com/customer-support/contact-us/form.aspx>

Note: Therma-Tru model S296 pre hung entry door to be used as base model for price comparison concerning other approved equal doors.

**Catherine Kane**  
**716 Main Street**  
**Torrington CT 06790**  
**Project # 143-351**

**FEATURES (EXTERIOR DOORS)**

1. Panel - 1 3/4" thick, fiberglass
2. Jambs - Wood
3. Hinges - 1 1/2 pair 3" x 3" loose pin but hinges.
4. Sill - Adjustable.
5. Borings - As noted

**PRE HUNG DOOR INSTALLATION**

1. Remove and dispose of existing doors.
2. Doors shall be installed in accordance to manufacturer's installation instructions. Install doors plumb and square so as to fit tightly, operate freely and latch securely. Including all required hardware as provided by manufacturer.
3. Install spun fiberglass insulation between door jambs and framing, including header and two side jambs.
4. Paint all door surfaces and jambs in accordance with the enclosed painting specification.
5. Provide and install new interior door casings matching original style and finish.
6. Provide and install new locksets as listed in the door schedule.

**STORM DOORS MANUFACTURER**

1. Gerkin Storm Door Model 902, as manufactured by Gerkin Doors & Windows, Sioux City, IA, 1-800-475-5061 with Dakota painted pull handle. Color - White
2. Tuff Core Series Model 133, as manufactured by Mercury Excellum Inc., 215 South Main Street, East Windsor, CT 06086 1-860-292-1800. Color - White

**STORM DOOR INSTALLATION**

1. Remove and dispose of existing doors.
2. Door shall be measured to fit existing opening. Swing to match existing. Door shall be installed plumb and square so as to fit tightly, operate freely and latch securely.
3. New door shall be equipped with external expander with soffit vinyl sweep at bottom. All hardware such as push button latch, pneumatic door closer and hurricane chain are required. Glazings to be in accordance with State and Local regulations.

**Cost: \$ \_\_\_\_\_**

**Catherine Kane**  
**716 Main Street**  
**Torrington CT 06790**  
**Project # 143-351**

## **CARPENTRY**

*GENERAL: This specification includes all labor, materials, taxes and permits required to perform the carpentry work described below. All work must conform to applicable building codes. Coordinate with the work of other trades specified elsewhere.*

### **INTENT**

The intent of the proposed work is to:

1. Replace front and rear house soffits with vented vinyl soffit and install Proper Vent in each rafter bay. Replace deteriorated garage overhead door wood trim with composite material, wrap fascias with aluminum, and install vinyl soffits. Wrap A & C house entry door trim with aluminum.
2. Install basement stair guard rail on open side of stairs, and graspable hand rail.

### **HOUSE & GARAGE TRIM**

1. Remove and dispose of the existing front and rear house soffit material. Provide and install white triple 4 center vented soffit material, replacing original, rewrap fascias with white coil stock aluminum. Provide and install Proper Vent in each roof rafter bay to create a channel of ventilation to the ridge vent. Staple the Proper vent in accordance with manufacturer's instructions.
2. Wrap the garage fascias and entry door trim with white aluminum coil stock. Provide and install white triple 4 soffit material on all garage soffits. Soffit panels shall be triple non-vented type. Wrap A & C house entry door trim with white aluminum coil stock.
3. Remove and dispose of garage overhead door wood jambs and casings. Replace with composite material such as Azek Brand or approved equal. Match original configuration. Install to manufacturers specs.

### **BASEMENT**

1. Provide and install new Brosco B75 handrail on one side of the basement stairs. New rail shall be fastened to framing members using brass plated handrail brackets. Railing to be between 34-38" measured from the stair nosing, continuous, and returned at the top and bottom.
2. Provide and install guardrail consisting of #2 pine, or comparable material, to enclose open side of basement stairs. Guard rail to be a minimum of 36" height, measured from the stair nosing, and gapping to be less than 4" diameter. Paint guard rail with one coat of primer and one coat of semi-gloss paint.

**Cost: \$ \_\_\_\_\_**

**Catherine Kane**  
**716 Main Street**  
**Torrington CT 06790**  
**Project # 143-351**

## **ELECTRICAL**

### **GENERAL**

1. Work in this section shall be governed by the Contract Documents. Contractor shall provide all material, labor, equipment, permits, taxes and fees necessary, as required to perform and complete the work specified herein and or as required by job conditions.
2. All materials shall be UL listed. All new fixtures shall be Energy Star rated.
3. Any cutting and patching necessary to complete the work described below will be the responsibility of the Contractor.
4. The use of surface mounted wire mold is prohibited unless specifically noted.

### **INTENT**

The intent of the proposed work is to:

1. Install wireless interconnected smoke detectors in 3 - bedrooms. Install wireless interconnected smoke & C.O detectors at 3 - levels of house.
2. Convert outlets to GFI as listed below.
3. Vent existing second floor bathroom exhaust fan to outside.
4. Replace existing electrical panel and circuit breakers.

### **SMOKE & C.O. DETECTORS**

1. Provide and install First Alert brand (or equal) wireless, battery powered, interconnected, smoke detectors in each bedroom. Provide and install First Alert brand (or equal) wireless, battery powered, interconnected, smoke/CO detectors on each level of house.

### **GFCI OUTLETS**

1. Convert existing outlets to GFCI: 1 - Kitchen backsplash, 2 - second floor bathroom, 2 - electrical panel.

### **BATHROOM FAN**

1. Duct the existing second floor bathroom exhaust fan to outside (shortest distance) with back draft damper. Ducting to be ridged metal, smooth interior surface, with joints running with air flow.

**Catherine Kane**  
**716 Main Street**  
**Torrington CT 06790**  
**Project # 143-351**

**SERVICE UPGRADE**

1. Remove and dispose of existing service panel and related breakers.
2. Provide and install a new 100 amp service panel with 32 breaker capacity indoor rated load center as manufactured by Cutler-Hammer, General Electric, Murry, Siemens, Square D or approved equal.
3. Provide and install two grounding rods for supplemental ground as required by code.
4. Label circuits clearly and permanently.

**Cost: \$ \_\_\_\_\_**

**Catherine Kane**  
**716 Main Street**  
**Torrington CT 06790**  
**Project # 143-351**

## **HEATING**

**GENERAL:** This specification includes all labor, materials, taxes and permits required to perform the work described below. All work must comply with applicable building

### **INTENT**

The intent of the proposed work is to:

1. Replace the existing condensate pump servicing the furnace in the basement.
2. Install a stainless steel chimney liner for furnace flu.

### **CONDENSATE PUMP**

1. Replace the existing condensate pump servicing the hot air furnace in the basement. Provide and install a new pump such as Everbilt Brand, Model EB - Pump, or equal. Provide and install new waste line emptying to location per instruction of the Torrington Building Department.

### **CHIMNEY LINER**

1. Provide and install a stainless steel chimney liner for the existing furnace flu.
2. Contractor shall size boiler to determine proper flue size and tie in stack to code specs.
3. Install stainless steel chimney cap such as Forever Cap brand or approved equal.

**Cost:** \$ \_\_\_\_\_

**Catherine Kane**  
**716 Main Street**  
**Torrington CT 06790**  
**Project # 143-351**

## **MASONRY**

**GENERAL:** This specification includes all labor, materials, taxes and permits required to perform the work described below. All work must comply with applicable building code. Coordinate with the work of other trades specified elsewhere.

### **INTENT**

The intent of the proposed work is to:

1. Replace two bottom cement steps at the front porch.
2. Re-point exterior house brick walls, replace missing or damaged brick.

### **FRONT ENTRY STAIRS**

1. Remove and dispose of the two existing bottom masonry steps at the front house entrance.
2. Excavate as required to a minimum depth of 12" below grade for footprint of new stairs, including area between bottom step riser and existing cement slab at base of stairs. Provide and install compacted process crushed stone with stone dust.
3. Form out and pour new stairs using 3,000 PSI Portland cement. Match configuration, dimensions, and finish, of other exiting stairs, including nosing.

### **BRICK REPOINTING**

1. Rake out deteriorated mortar joints of all exterior house and porch brick walls, and porch stairs and landings, removing all loose or damaged mortar.
2. Wet joints thoroughly.
3. Re-mortar joints using Portland cement-based mortar, compressing mortar to fill joints completely. Tool mortar to match existing work. Re-install any existing loose bricks, replace missing or damaged brick, matching original.

**Cost:** \$ \_\_\_\_\_

**Catherine Kane**  
**716 Main Street**  
**Torrington CT 06790**  
**Project # 143-351**

### **PAINTING**

*GENERAL: This specification includes all labor, material, insurance, taxes, permits and fees required to perform the work described below. Coordinate with the work of other trades specified elsewhere. The Contractor shall adhere strictly to the provisions of the ALead-Based Paint Poisoning Prevention Act. Specifically, the Contractor will not utilize lead-based paint as a finish or undercoat or any other use in or out of residential dwellings and shall comply with all provisions of Public Law 91-695 (42 U.S.C. 4831) ALead Based Paint Poisoning Act.*

### **INTENT**

The intent of the proposed work is to:

1. Address all lead hazards listed in the enclosed lead report.
2. Paint all newly installed components (that require painting) listed in the enclosed specification unless listed otherwise. Paint front entry door and trim.

### **GENERAL PAINTING REQUIREMENTS**

1. All new materials to be painted shall be primed with materials as recommended by the manufacturer of the finish paint.
2. On all surfaces to be painted, any necessary sanding, scraping, cleaning, priming, puttying or other surface preparation is required.
3. All painting must be performed in accordance with manufacturer's instructions. All painting is to be performed in two (2) coats.
4. Contractor shall use Benjamin Moore, California Paint or Sherwin Williams paint or approved equal.
5. Colors to be selected by Owner from manufacturer's standard color chart. Paint sheen (gloss, semi-gloss, eggshell, flat, etc.) to be owner's choice.
6. All items not requiring painting are to be completely protected from over-spray, drips, or any other damage during the course of this work.
7. Upon completion, all work must be free from runs, drips, sags, variations in color or gloss or any other defect.

Cost: \$ \_\_\_\_\_

**Catherine Kane  
716 Main Street  
Torrington CT 06790  
Project # 143-351**

**COST SUMMARY**

ROOFING	\$	_____
WINDOWS	\$	_____
DOORS	\$	_____
CARPENTRY	\$	_____
ELECTRICAL	\$	_____
HEATING	\$	_____
MASONRY	\$	_____
PAINTING (INCLUDING LEAD PAINT HAZARD REDUCTION)	\$	_____
<b>TOTAL</b>	<b>\$</b>	<b>_____</b>

**Small, Minority, Women-Owned Business Concern Representation**

The bidder represents and certifies as part of its bid/ offer, that it –

(a)  Is,  Is not a small business concern. "Small business concern," as used in this provision, means a concern, including its affiliates, that is independently owned and operated, not dominant in the field of operation in which it is bidding, and qualified as a small business under the criteria and size standards in 13 CFR 121.

(b)  Is,  Is not a women-owned business. "Women-owned business enterprise," as used in this provision, means a business that is at least 51 percent owned by a woman or women who are U.S. citizens and who also control and operate the business.

(c)  Is,  Is not a minority business enterprise. "Minority business enterprise," as used in this provision, means a business which is at least 51 percent owned or controlled by one or more minority group members or, in the case of a publicly owned business, at least 51 percent of its voting stock is owned by one or more minority group members, and whose management and daily operations are controlled by one or more such individuals. For the purpose of this definition, minority group members are:

(Check the block applicable to you)

- |   |  |   |
|---|--|---|
| <input type="checkbox"/> Black Americans        | <input type="checkbox"/> Asian Pacific Americans | <input type="checkbox"/> Hispanic Americans       |
| <input type="checkbox"/> Asian Indian Americans | <input type="checkbox"/> Native Americans        | <input type="checkbox"/> Hasidic Jewish Americans |

\*\*\*\*\*

I, the undersigned Contractor agree to provide all labor, material, permits, taxes, insurance, equipment and related fees, necessary to complete the work as specified above for the property located at:

*716 Main Street  
Torrington CT 06790  
Project #: 143-351*

All work will be performed in accordance to applicable Building and Fire Code(s).

Company Name: \_\_\_\_\_

Address: \_\_\_\_\_

Phone: \_\_\_\_\_ Fax: \_\_\_\_\_ Email: \_\_\_\_\_

FEIN or SSAN#: \_\_\_\_\_ Contractor License # \_\_\_\_\_ Exp. Date: \_\_\_\_\_

Date: \_\_\_\_\_ Print Name: \_\_\_\_\_

Signature: \_\_\_\_\_

Total Bid Amount: \$ \_\_\_\_\_

Amount Written: \_\_\_\_\_

(This information must be submitted in order to have your bid considered responsive)

PROPERTY OWNER VERIFICATION

I, the undersigned Owner(s) acknowledge that I have fully read and understand the attached project specifications. I understand this to be the scope of work and the extent of the renovations to be performed at the property location shown below.

716 Main Street  
Torrington CT 06790  
Project #: 143-351

I understand that any revisions to these specifications changing the scope of work can be made only for unforeseen circumstances. This is for my protection and for providing a clear understanding to the contractor who will provide a quote for the proposed work.

DATE: 4/10/15 OWNER: Catherine J. Kane  
Catherine Kane